

WAAS
CH **40105**
W30A

APP CRS
305°

Rwy Ldg
TDZE
Apt Elev
7913
9
9


RNAV (GPS) Z RWY 30
MIAMI INTL (MIA)

RNP APCH - GPS.
Inop table does not apply to LNAV Cat C and D.
For inop ALS, increase LPV all Cats visibility to RVR 4500.

MALS

MISSED APPROACH: Climb to 3000 direct IPFAH and on 329° track to BRBRA and hold.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
-------------------------	--------------------------------------	-----------------------------------	--

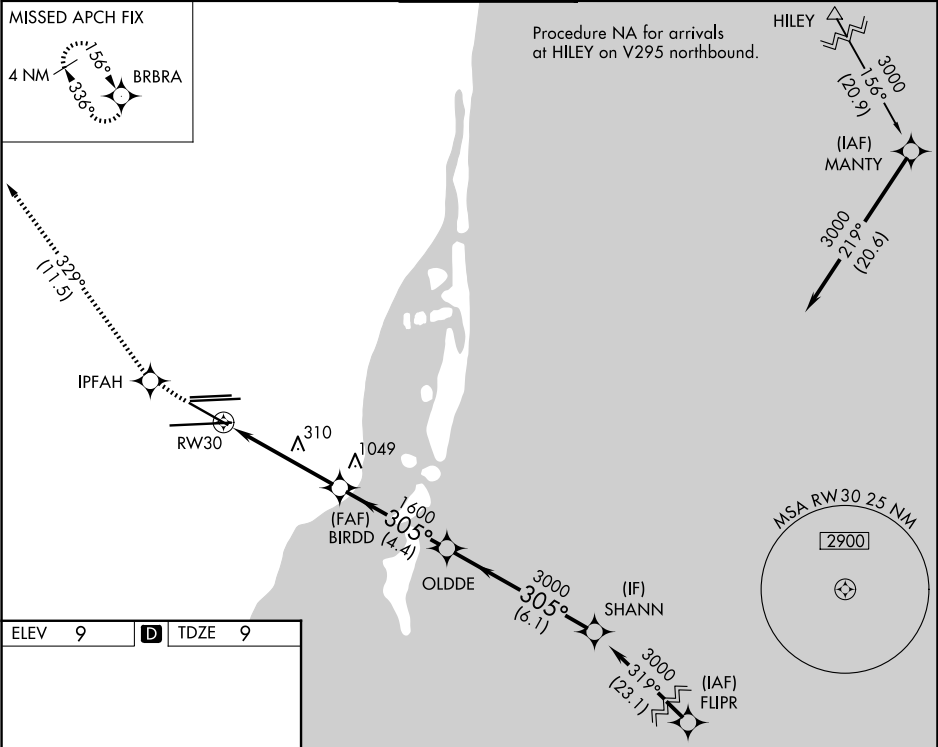

ELEV 9

D

TDZE 9

TDZ/CL Rwy 8R
REIL Rwy 8L and 26R
HIRL all Rwy

3000	IPFAH	tr 329°	BRBRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	
		BIRDD	OLDDE	SHANN	
1.7 NM		1.600	3000	305°	3000
1.7 NM		3.1 NM	4.4 NM	6.1 NM	GP 3.00° TCH 51
CATEGORY	A		B	C	D
LPV	DA	286/40		277 (300-¾)	
LNAV	MDA	620/40	611 (700-¾)	620-1½	611 (700-1½)