


WAAS CH 50429 W22A	APP CRS 225°	Rwy Ldg TDZE 2855 Apt Elev 2872
--	------------------------	---

RNAV (GPS) RWY 22
MIDLAND INTL AIR AND SPACE PORT (MAF')

RNP APCH.		MISSED APPROACH: Climb to 5000 direct TOKRE and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 25°C. Circling Rwy 16L NA at night.				
ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7(CTAF) 0273.45	GND CON 121.9 348.6	UNICOM 122.95

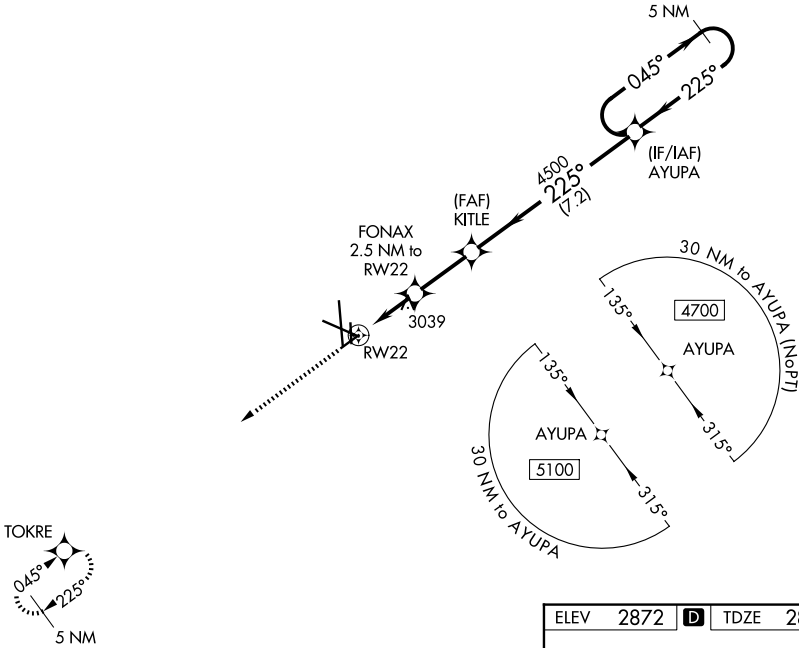

5000 TOKRE		FONAX 2.5 NM to RW22		KITLE 4500		AYUPA 5 NM Holding Pattern	
*LNAV only		*1.3 NM to RW22		*3700		4500	
GP 3.00° TCH 50		1.3		1.2		2.5 NM	
CATEGORY		A		B		C	
LPV DA		3055-3/4		200 (200-3/4)			
LNAV/VNAV DA		3317-13/8		462 (500-13/8)			
LNAV MDA		3320-1 465 (500-1)		3320-13/8 465 (500-13/8)			
CIRCLING		3440-1 568 (600-1)		3440-1 568 (600-1 1/2)		3520-2 648 (700-2)	

