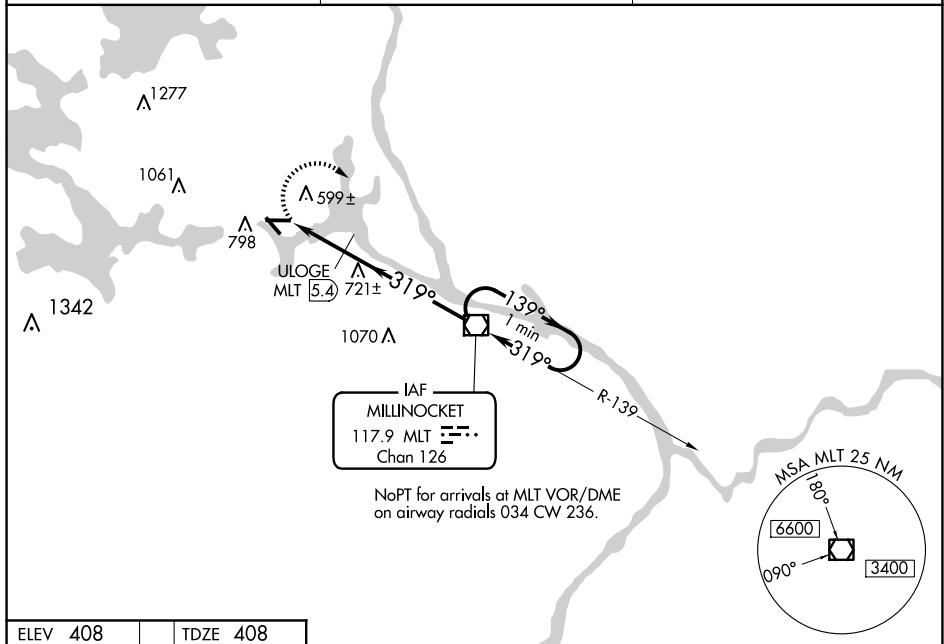


VOR RWY 29  
MILLINOCKET MUNI (MLT)

**MISSED APPROACH:** Climbing right turn to 3000 direct MLT VOR/DME and hold, continue climb-in-hold to 3000.

UNICOM  
122.8 (CTAF) **L**

**\*1180 When using Houlton altimeter setting.**

The diagram illustrates the ULOGE FIX minimums. It shows a series of waypoints and altitudes:

- Waypoint 1:** MLT (7.7) at 1060 feet.
- Waypoint 2:** ULOGE MLT (5.4) at 1060 feet.
- Waypoint 3:** MLT VOR/DME intersection at 1060 feet.
- Waypoint 4:** 139° bearing from Waypoint 3, leading to 3000 feet.
- Waypoint 5:** 319° bearing from Waypoint 4, leading back to Waypoint 3.

Distances between waypoints are indicated as 2.3 NM and 5.4 NM. A note specifies "One Minute Holding Pattern".

| CATEGORY | A      | B           | C                                                  | D                      |
|----------|--------|-------------|----------------------------------------------------|------------------------|
| S-29     | 1060-1 | 652 (700-1) | 1060-1 $\frac{3}{4}$<br>652 (700-1 $\frac{3}{4}$ ) | 1060-2<br>652 (700-2)  |
| CIRCLING | 1100-1 | 692 (700-1) | 1100-2<br>692 (700-2)                              | 1380-3<br>972 (1000-3) |

**ULOGES FIX MINIMUMS**

| CATEGORY | A      | B           | C                                                 | D                                                 |
|----------|--------|-------------|---------------------------------------------------|---------------------------------------------------|
| S-29     | 880-1  | 472 (500-1) | 880-1 $\frac{1}{4}$<br>472 (500-1 $\frac{1}{4}$ ) | 880-1 $\frac{1}{2}$<br>472 (500-1 $\frac{1}{2}$ ) |
| CIRCLING | 1100-1 | 692 (700-1) | 1100-2<br>692 (700-2)                             | 1380-3<br>972 (1000-3)                            |

NE-1, 27 NOV 2025 to 25 DEC 2025