

APP CRS 121°	Rwy Ldg 10000 TDZE 842 Apt Elev 842
------------------------	--

RNAV (RNP) Y RWY 12R

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

T For uncompensated Baro-VNAV systems, procedure NA below -20°C (-4°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 12L. GPS required. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct EGT VORTAC and hold.

ATIS
135.35 239.275

MINNEAPOLIS APP CON
118.725 335.65 (35)
119.3 335.65 (12L-30R, 4-22, 17)
126.95 335.65 (12R-30L)

MINNEAPOLIS TOWER
123.675 273.55 (17-35)
123.95 273.55 (12L-30R)
126.7 273.55 (12R-30L, 4-22)

GND CON
121.8 348.6 (N)
121.9 348.6 (S)
127.925 348.6 (W)

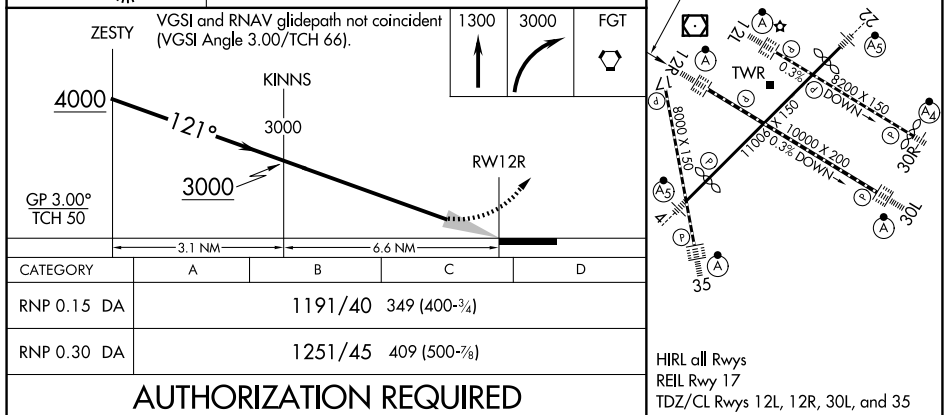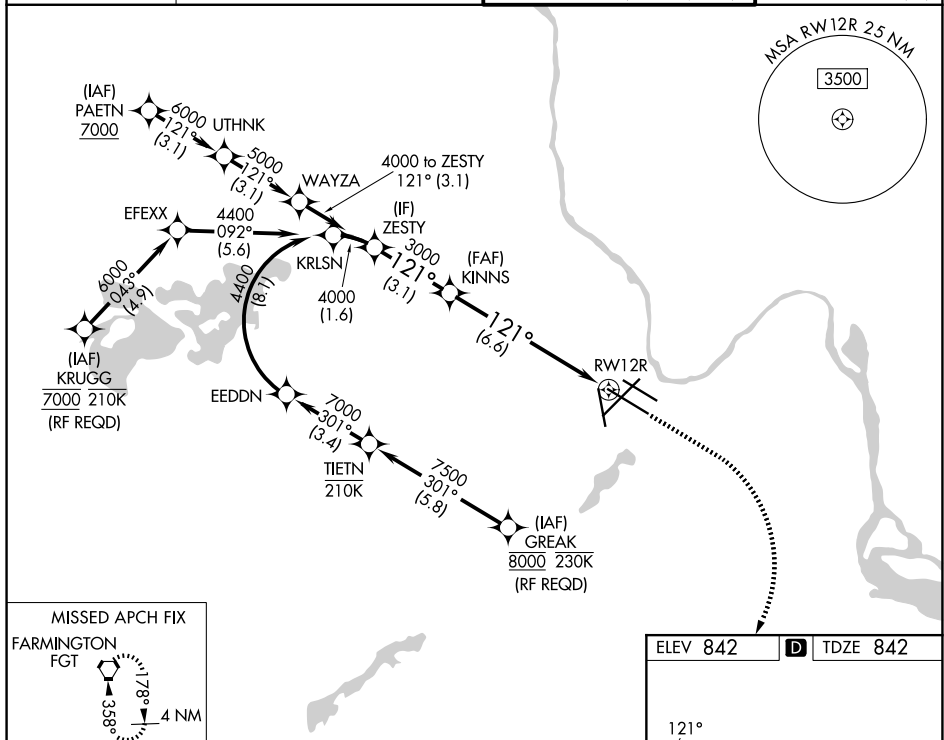

MINNEAPOLIS, MINNESOTA
Amdt 1 05JAN17

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)
44°53'N-93°13'W RNAV (RNP) Y RWY 12R