



WAAS CH 70304 W32A	APP CRS 320°	Rwy Ldg TDZE Apt Elev	9618 25 26
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 32

MOBILE INTL (BFM)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct WORIR and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000, and LNAV Cats C/D visibility to RVR 5500.	AS	

ATIS 135.575	MOBILE APP CON ★ 118.5 269.3	INTERNATIONAL TOWER ★ 118.8 (CTAF) 0 251.1	GND CON 121.7 239.3	UNICOM 122.95
------------------------	--	--	-------------------------------	-------------------------

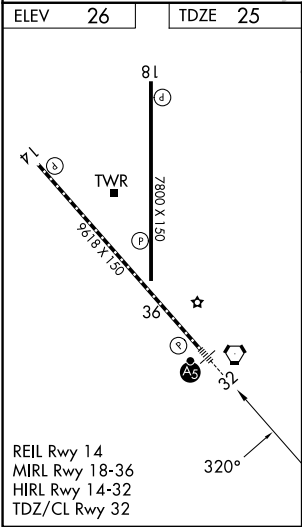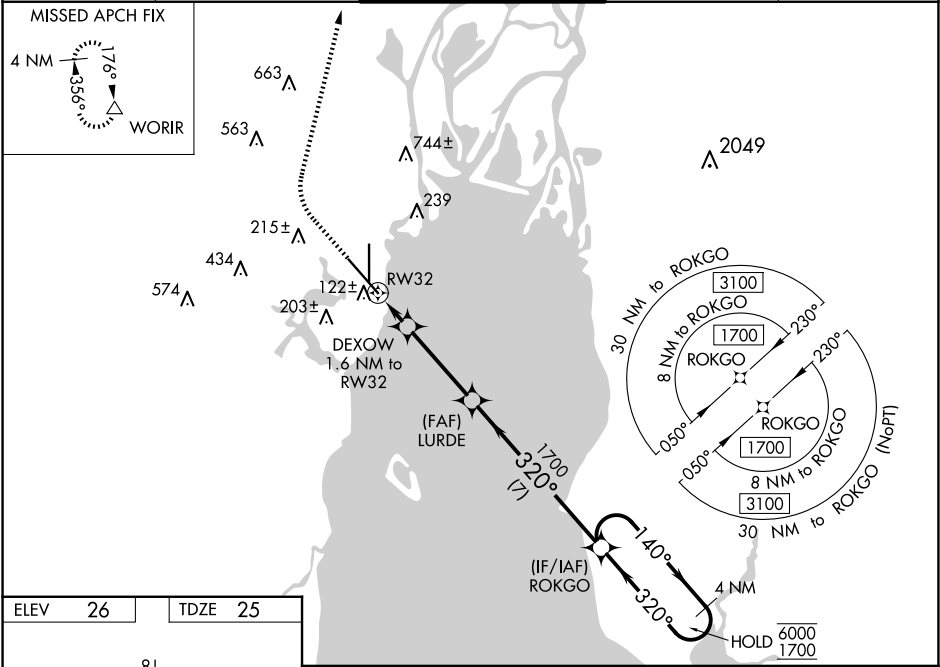

800	2000	WORIR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				
↑	↷	△					
CATEGORY		A		B		C	D
LPV	DA			225/18		200 (200-½)	
LNAV/ VNAV	DA			283/24		258 (300-½)	
LNAV	MDA	380/24		355 (400-½)		380/30 355 (400-¾)	
CIRCLING		680-1		654 (700-1)		680-1¾ 654 (700-1¾) 1100-3 1074 (1100-3)	

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025