


LOC I-MZR 109.5	APP CRS 222°	Rwy Ldg 7504 TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 22
MONROE RGNL (MLU)

DME or RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.
Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM. # DME from MLU VORTAC.			

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

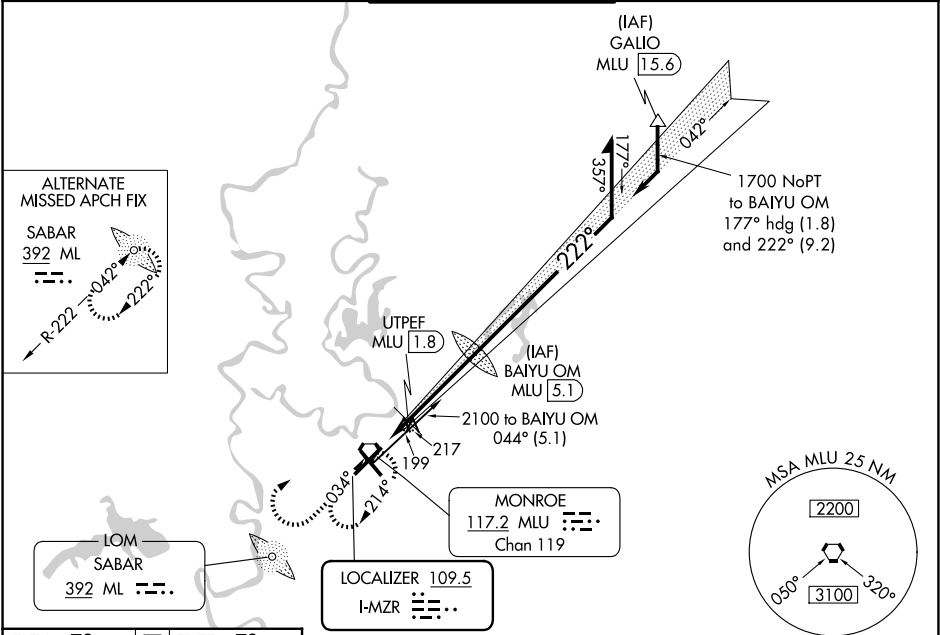

ELEV 79	D	TDZE 78
REIL Rws 14 and 32 MIRL Rwy 14-32 HIRL Rwy 4-22		
FAF to MAP 4.8 NM		
Knots	60	90 120 150 180
Min:Sec	4:48	3:12 2:24 1:55 1:36

1800 3000 MLU		BAIYU OM MLU 5.1		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).	
*LOC only.		UTPEF MLU 1.8		Remain within 10 NM	
1.4 NM		3.4 NM		GS 3.00° TCH 54	
CATEGORY	A	B	C	D	
S-ILS 22	278-½ 200 (200-½)				
S-LOC 22	560-½	482 (500-½)	560-1	482 (500-1)	
CIRCLING	580-1	501 (600-1)	740-¾ 661 (700-¾)	1160-3 1081 (1100-3)	
# UTPEF FIX MINIMUMS					
S-LOC 22	500-½	422 (500-½)	500-¾	422 (500-¾)	
CIRCLING	580-1	501 (600-1)	740-¾ 661 (700-¾)	1160-3 1081 (1100-3)	