


LOC I-MLU 109.5	APP CRS 042°	Rwy Ldg 7504 TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 4
MONROE RGNL (MLU)

ADF or DME required for procedure entry.			MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.	
Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM. UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500. ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA. # DME from MLU VORTAC.					
ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95	

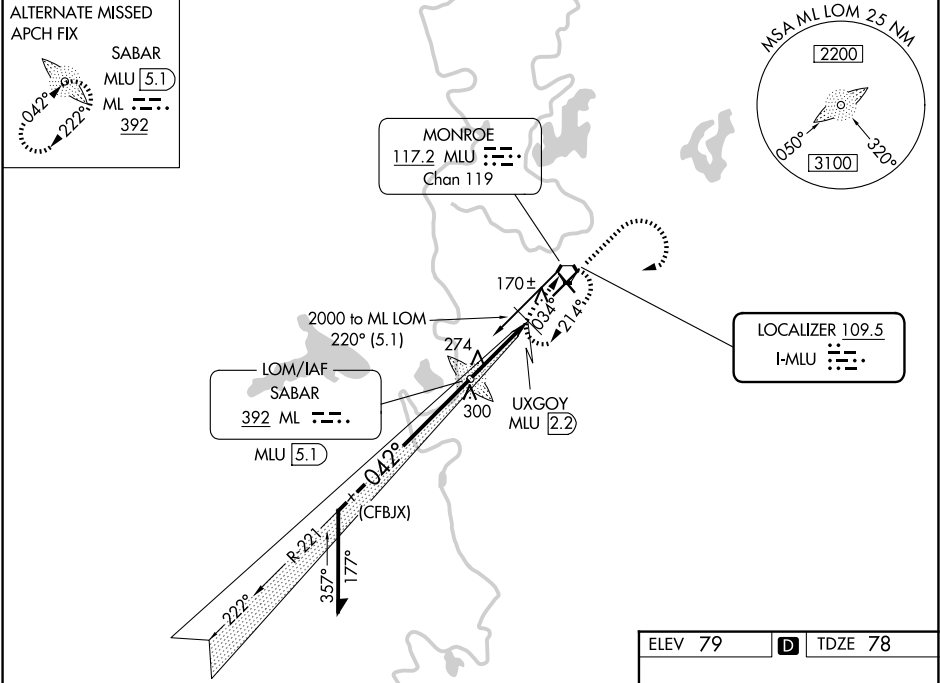

Remain within 10 NM

2000

042°

222°

1483

1500

540

2.9 NM

1.3 NM

ML LOM

MLU [5.1]

UXGOY MLU [2.2]

* LOC only.

GS 3.00° TCH 50

CATEGORY	A	B	C	D
S-ILS 4		**278/24 200 (200-½)		
S-LOC 4	540/24	462 (500-½)	540/50	462 (500-1)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)
# UXGOY FIX MINIMUMS				
S-LOC 4	420/24	342 (400-½)	420/30	342 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

