


WAAS CH 69602 W10A	APP CRS 098°	Rwy Ldg TDZE Apt Elev	7000 198 257
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 10R
MONTEREY RGNL (MRY)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. Circling NA south of Rwy 10R-28L. For inop ALS, increase LPV all Cats visibility to 1½ SM and LNAV Cat C/D visibility to 2½ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing left turn to 5000 direct SNS VORTAC and hold, continue climb-in-hold to 5000. * Missed approach requires minimum climb of 387 feet per NM to 1700.
---	-----------	--

ATIS 119.25	NORCAL APP CON 133.0 251.15 (001°-135°) 127.15 307.125 (136°-360°)	MONTEREY TOWER ★ 118.4 (CTAF) 257.8	GND CON 120.875 348.6	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

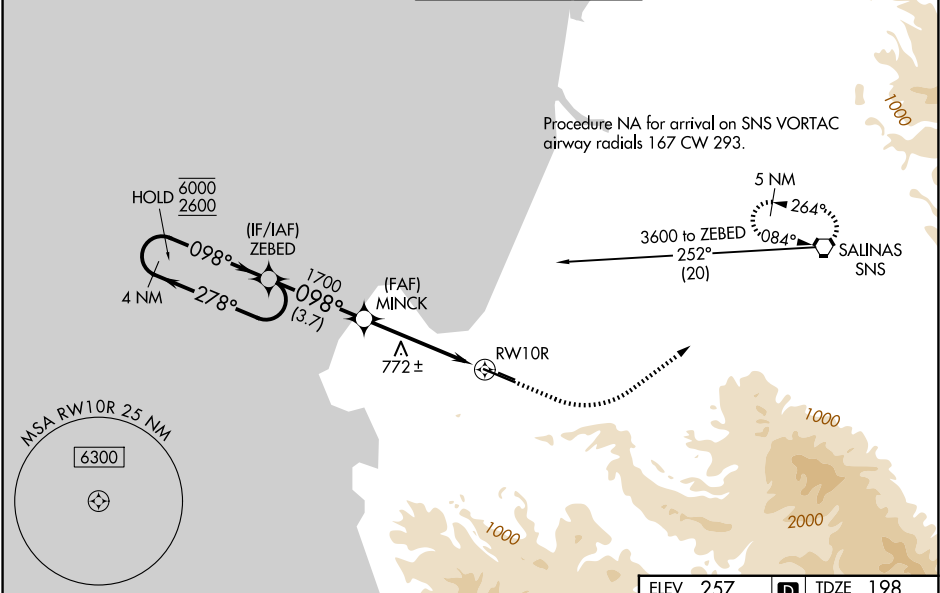

4 NM Holding Pattern					ELEV 257 D TDZE 198				
CATEGORY	A	B	C	D					
LPV DA*	398/24 200 (200-½)								
LPV DA	677/50 479 (500-1)								
LNAV/VNAV DA	754/60 556 (500-1¼)								
LNAV MDA	980/24 782 (800-½)	980/40 782 (800-¾)	980-1¾ 782 (800-1¾)						
CIRCLING	980-1 723 (800-1)	980-1¼ 723 (800-1¼)	1280-3 1023 (1100-3)		NA				
					MIRL Rwy 10L-28R HIRL Rwy 10R-28L 1 REIL Rwy 28L 1 REIL Rwy 10L and 28R				

SW-2, 27 NOV 2025 to 25 DEC 2025

SW-2, 27 NOV 2025 to 25 DEC 2025