

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

MISSED APPROACH:
Climb to 2700 direct SINNI and hold.

ATIS 124.3	GREAT LAKES APP CON ★ 119.8 290.35 (N) 133.825 290.35 (S)	MUSKEGON TOWER ★ 126.25 (CTAF) 0 343.725	GND CON 121.6	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

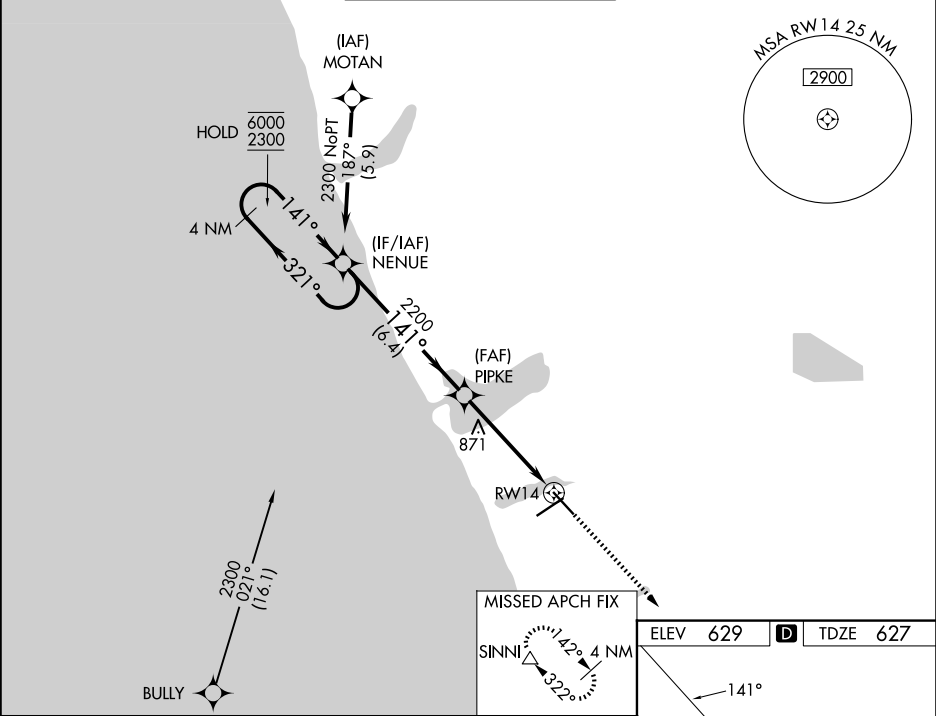

4 NM

Holding Pattern

6000

2300

GP 3.00°

TCH 45

←321°

141°→

NENUE

PIPKE

2200

2200

6.4 NM

3.1 NM

1.6

2700

SINNI

△

*1.6 NM to RW14

*LNAV only

RW14

CATEGORY	A	B	C	D
LPV DA	877-¾		250 (300-¾)	
LNAV/VNAV DA	1079-1½		452 (500-1½)	
LNAV MDA	1180-1	553 (600-1)	1180-1½ 553 (600-1½)	1180-1¾ 553 (600-1¾)
CIRCLING	1180-1	551 (600-1)	1200-1½ 571 (600-1½)	1200-2 571 (600-2)

REIL Rwy 6

REIL Rwy 14

HIRL Rwy 6-24

HIRL Rwy 14-32