

WAAS CH 56613 W01A	APP CRS 006°	Rwy Ldg 5930 TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Y RWY 1L
NAPA COUNTY (APC)


RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or
A above 54°C. Circling Cats A/B/C NA northeast of Rwy 19R and 24.
Circling Cat D NA east of Rwy 19L-1R. Inop table does not apply to LPV,
LNAV/VNAV all Cats, and LNAV Cats C/D. Circling Rwy 6 NA at night.

MALS

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER ★ 118.70 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------	-------------------------------	-------------------------------------	------------------	------------------

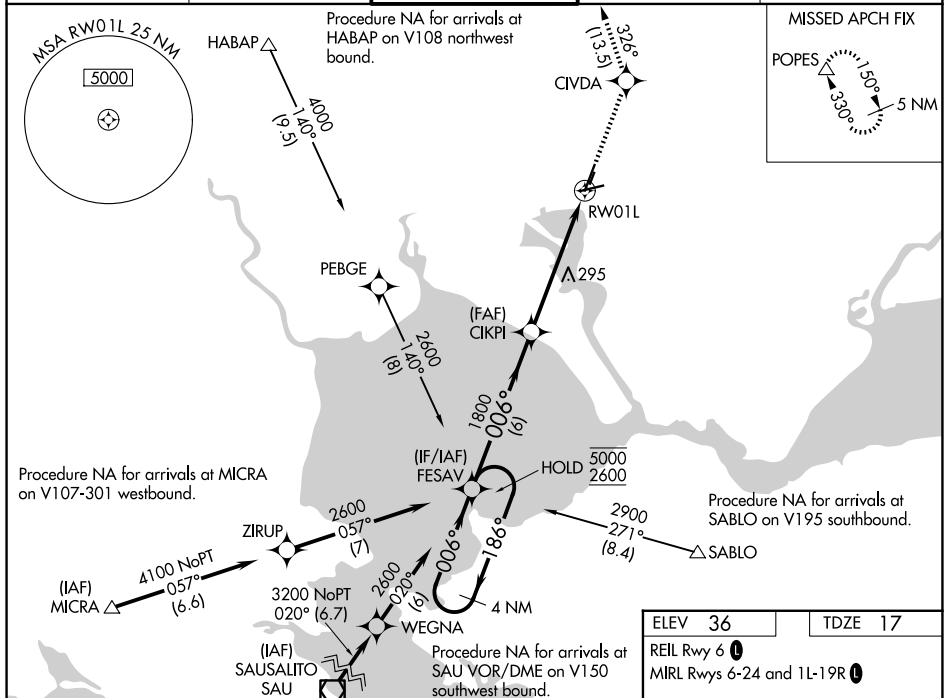

4 NM Holding Pattern 5000 ← 186° 2600 → 006° GP 3.00° TCH 50		FESAV 1800 006°		CIKPI 1800 *3.7 NM to RW01L		5000 ↑ CIVDA ✱ tr 326° POPES △		*LNAV only RW01L	
		6 NM		1.8 NM		3.7 NM			
CATEGORY	A	B	C	D					
LPV DA	1252-5		1235 (1300-5)						
LNAV/VNAV DA	1051-4		1034 (1100-4)						
LNAV MDA	1260-1 1243 (1300-1)	1260-1¼ 1243 (1300-1¼)	1260-3		1243 (1300-3)				
CIRCLING	1260-1¼ 1224 (1300-1¼)	1260-1½ 1224 (1300-1½)	1280-3 1244 (1300-3)		1300-3 1264 (1300-3)				

