

LOC/DME I-SSX <u>109.35</u> Chan 30 (Y)	APP CRS 201°	Rwy Ldg 8000 TDZE 551 Apt Elev 599
---	------------------------	---

ILS or LOC RWY 20L
NASHVILLE INTL (BNA)

DME required. RADAR required for procedure entry.



MALS

MISSED APPROACH: Climb to 1300, then climbing left turn to 4000 on heading 040° and on BNA VORTAC R-072 to LENON/BNA 25.1 DME and hold.

T Simultaneous approach authorized.

A * RVR 1800 authorized with use of FD or AP or HUD to DA.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

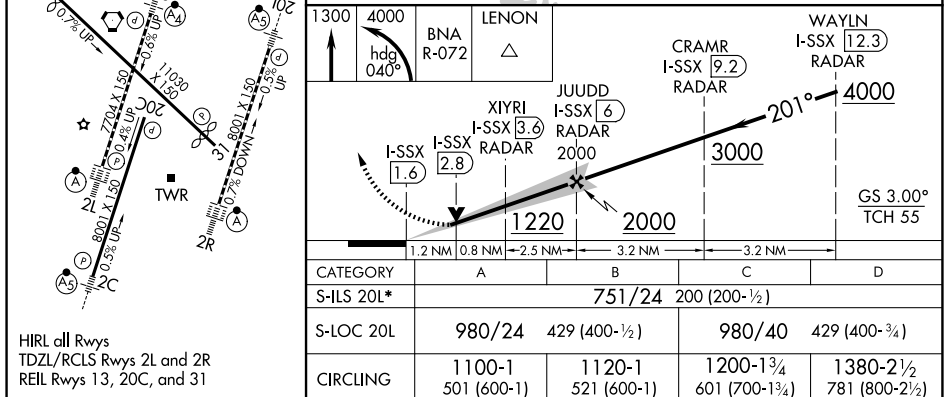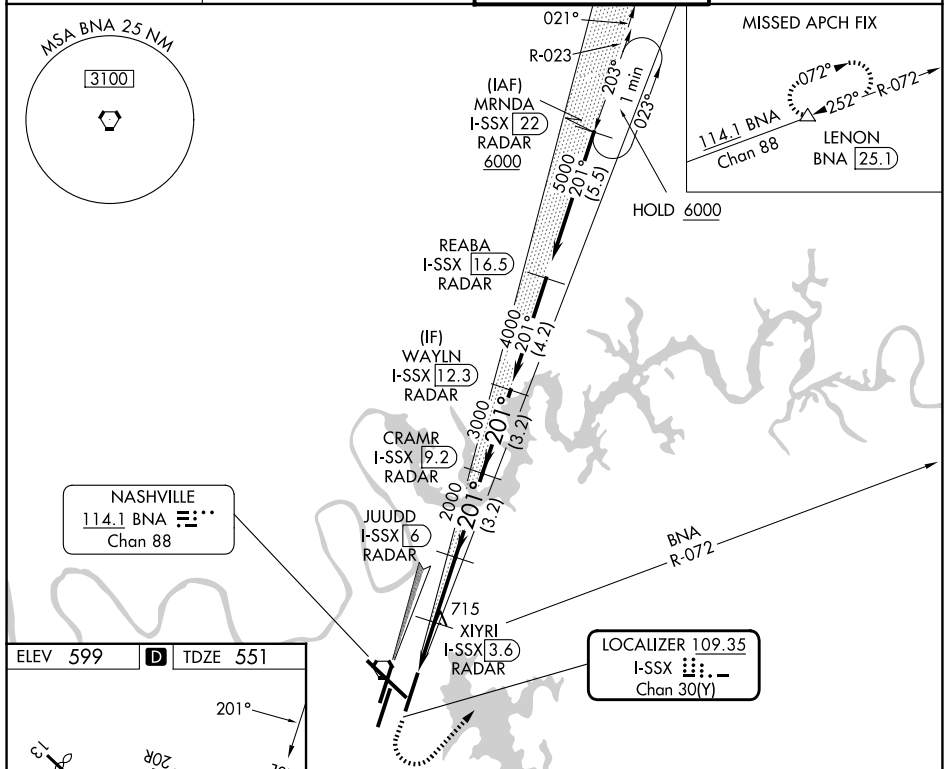

NASHVILLE, TENNESSEE
Amdt 7 02OCT25

36°07'N-86°41'W

NASHVILLE INTL (BNA)
ILS or LOC RWY 20L

SE-1, 27 NOV 2025 to 25 DEC 2025

SE-1, 27 NOV 2025 to 25 DEC 2025