

APP CRS

Rwy Ldg

2DZE

Apt Elev

136°

9487

567

599

RNAV (GPS) RWY 13

NASHVILLE INTL (BNA)

RNP APCH


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -16°C or above 47°C.

MISSED APPROACH: Climb to
3000 direct ONUGE and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

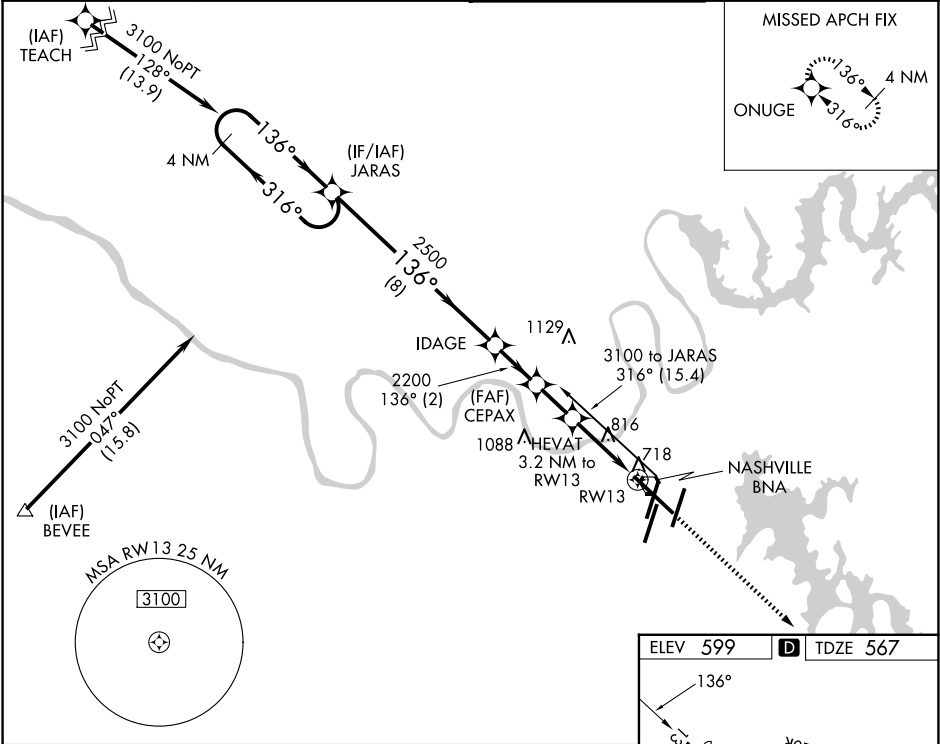

4 NM Holding Pattern

JARAS

IDAGE

CEPAX

HEVAT

RW13

3000

ONUGE

GP 3.00° TCH 55

3100

2500

2200

1600

8 NM

2 NM

1.8 NM

1.9 NM

1.3

*LNAV only.

*1.3 NM to RW13

CATEGORY	A	B	C	D
LNAV/VNAV DA	968-1½ 401 (400-1½)			
LNAV MDA	1080-1	513 (500-1)	1080-1½ 513 (500-1½)	1080-1¾ 513 (500-1¾)
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)

