



APP CRS	Rwy Ldg	7702
201°	TDZE	578
	Apt Elev	599


RNAV (RNP) Z RWY 20R

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From JAQQE, FLMBE, IICKS, POORR, or KLOPR: RF.	MALSF	MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct BEVEE and hold.
Simultaneous approach authorized with Rwy 20L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Inop table does not apply.		

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
-----------------	--	--------------------------------	------------------------

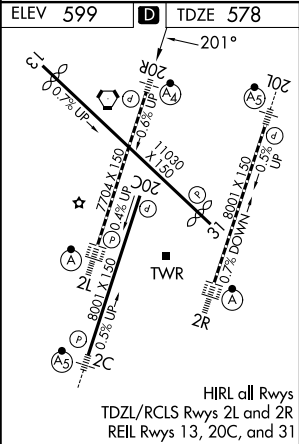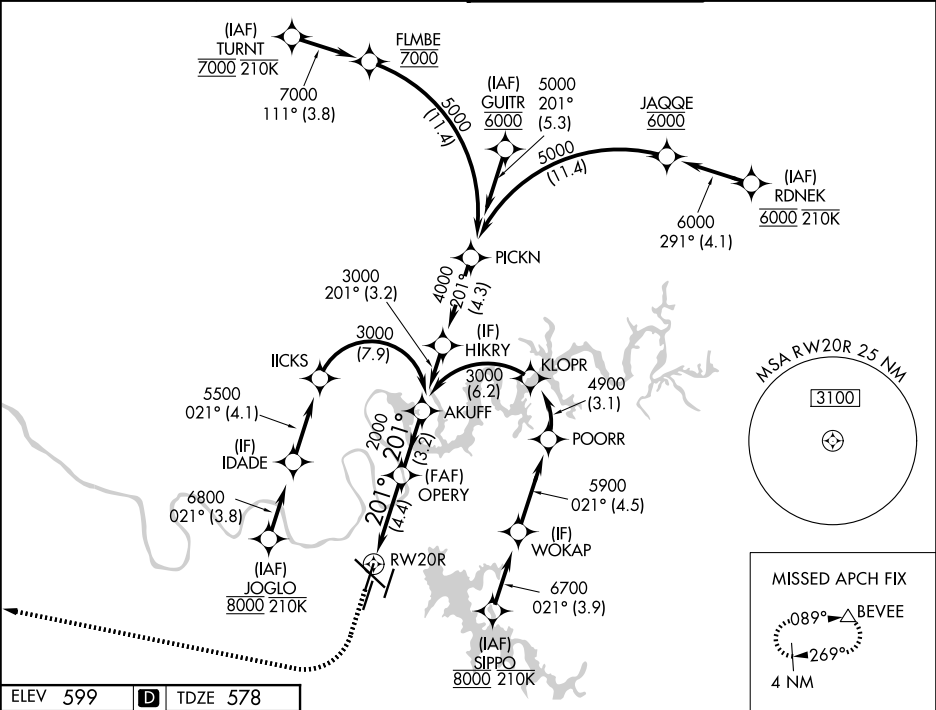

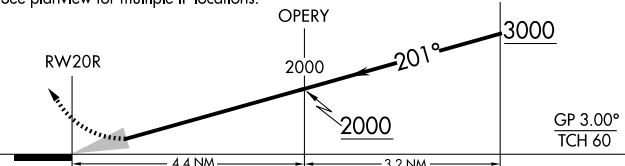1 200	4000	BEVEE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).	
				
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.13 DA	927/40 349 (400-¾)			
RNP 0.30 DA	1042/60 464 (500-1¼)			
AUTHORIZATION REQUIRED				