

APP CRS	Rwy Ldg	7702
021°	TDZE	599
	Apt Elev	599

RNAV (RNP) Z RWY 2L
NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From BRDYY, SYNEP, MNGRL, CHUKB,
or SHELE: RF.

T For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C.
A Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15
all Cats visibility to RVR 4500.

ALSF-2



MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct BEVEE and hold.

D-ATIS

135.1

NASHVILLE APP CON
118.4 360.7 (030°-196°)
119.35 372.0 (197°-029°)




NASHVILLE TOWER

118.6 257.8


GND CON

121.9 348.6

MISSED APCH FIX

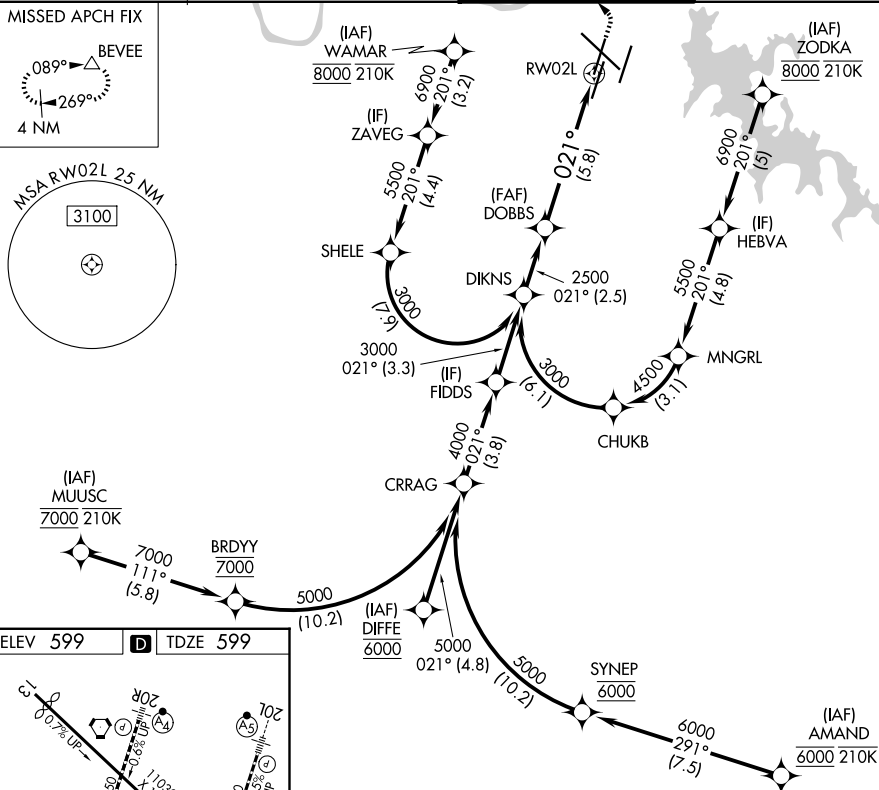

ELEV 599	D	TDZE 599
----------	----------	----------

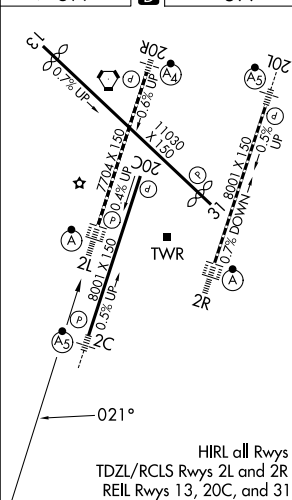

NASHVILLE, TENNESSEE
Amdt 3 02OCT25

36°07'N-86°41'W

NASHVILLE INTL (BNA)

RNAV (RNP) Z RWY 2L

SE-1, 27 NOV 2025 to 25 DEC 2025

AUTHORIZATION REQUIRED