

WAAS CH 61302 W18A	APP CRS 177°	Rwy Ldg 5510 TDZE 8 Apt Elev 8
--	------------------------	---

RNAV (GPS) RWY 18R

LAKEFRONT (NEW)

⚠


Inoperative table does not apply to LPV all Cats. For inoperative MALSR, increase LNAV Cat A and B visibility to 1 mile. Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received; use Louis Armstrong New Orleans Intl altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV and Circling Cat C and D visibility ¼ mile. VDP NA with Louis Armstrong New Orleans Intl altimeter setting. For inoperative MALSR when using Louis Armstrong New Orleans Intl altimeter setting, increase LNAV Cat A and B visibility to 1 mile.

MALSR

MISSED APPROACH:

Climb to 2100 direct WUDON and left turn on track 082° to MORLE and on track 356° to SNAKI and hold.

ATIS 124.9	NEW ORLEANS APP CON 133.15 290.3 (N) 123.85 256.9 (S)	LAKEFRONT TOWER ★ 118.95 (CTAF) 0	GND CON 121.7 335.575
----------------------	---	---	---------------------------------

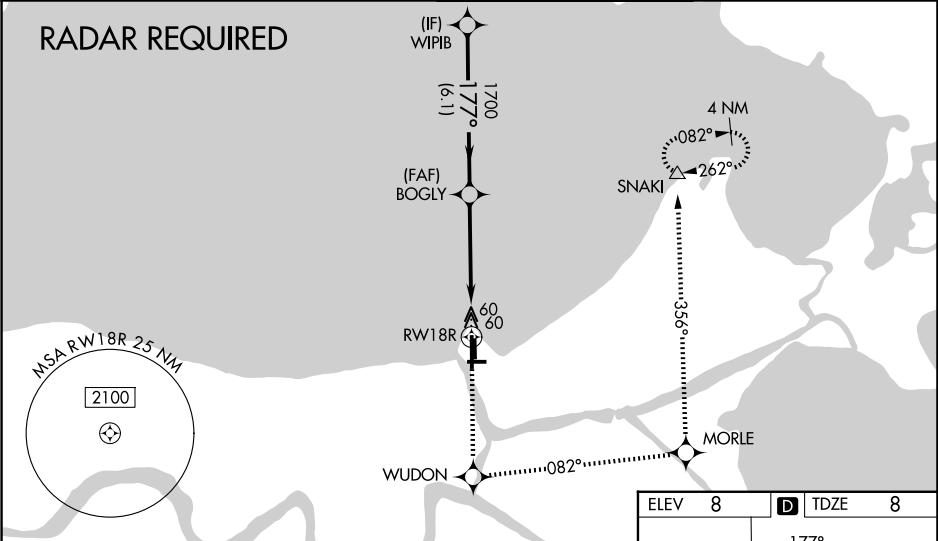

Procedure Turn NA		2100 ↑	WUDON ✱	MORLE tr 082°	tr 356°	SNAKI △
WIFIB		BOGLY				
1700 GP 3.00° TCH 48		*1.8 NM to RW18R				
6.1 NM		3.3 NM		1.8 NM		
CATEGORY	A	B	C	D	*LNAV only.	
LPV DA	258-¾		250 (300-¾)			
LNAV/ VNAV DA	521-1¼		513 (600-1¼)			
LNAV MDA	640-¾	632 (700-¾)	640-1¼	632 (700-1¼)	640-1½	632 (700-1½)
CIRCLING	640-1	632 (700-1)	700-2	692 (700-2)	820-2¾	812 (900-2¾)

ELEV 8

D

TDZE 8

MIRL Rwy 18R-36L
MIRL Rwy 9-27 and 18L-36R
REIL Rwy 9, 18L, 36L and 36R