


WAAS CH 86913 W36A	APP CRS 357°	Rwy Ldg 5135 TDZE 8 Apt Elev 8
--	------------------------	---

RNAV (GPS) RWY 36L

LAKEFRONT (NEW)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 369 feet, LNAV/VNAV DA to 460 feet and all visibilities ½ mile; increase all MDA 40 feet and Circling Cat D visibility ½ mile. VDP and Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting.	MISSED APPROACH: Climb to 2100 direct PNDAR and via track 064° to SNAKI and hold.
--	---

ATIS 124.9	NEW ORLEANS APP CON 133.15 290.3 (N) 123.85 256.9 (S)	LAKEFRONT TOWER ★ 118.95 (CTAF) 0	GND CON 121.7 335.575
----------------------	---	---	---------------------------------

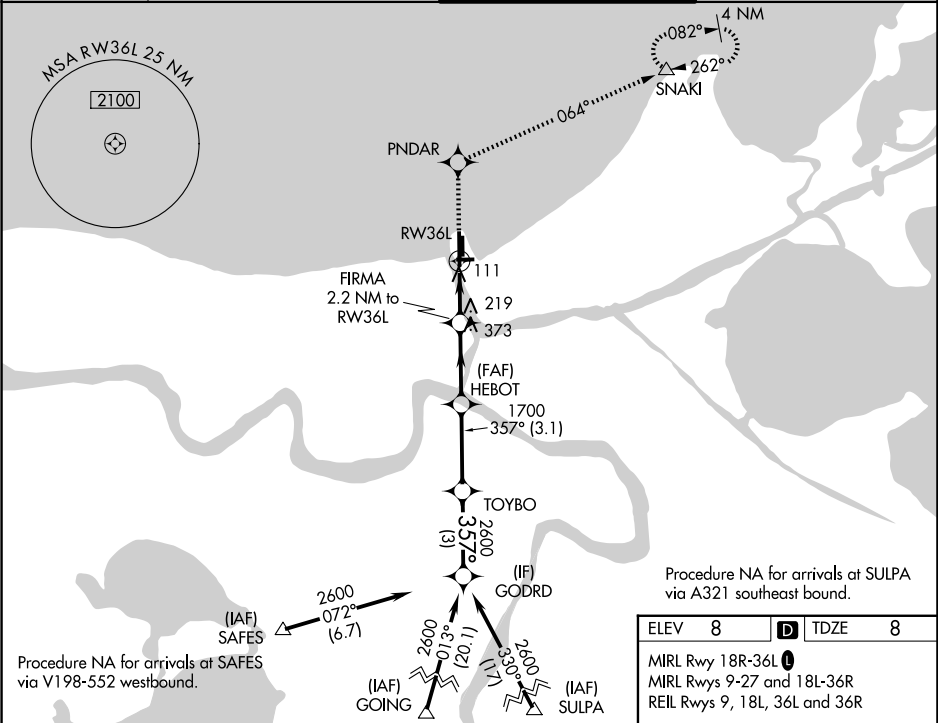

ELEV 8	D TDZE 8
MIRL Rwy 18R-36L 0 MIRL Rwy 9-27 and 18L-36R REIL Rwy 9, 18L, 36L and 36R	

2100	PNDAR	tr 064°	SNAKI	Procedure Turn NA
*LNAV only.				
RW36L 1.7 NM to RW36L 0.5 NM to FIRMA 2.2 NM to RW36L 2.9 NM to HEBOT 3.1 NM to TOYBO 3 NM to GODRD				
1.7 NM to RW36L 760 1700 357° 2600 GP 3.00° TCH 50				
CATEGORY	A	B	C	D
LPV DA	340-1⅛ 332 (400-1⅛)			
LNAV/VNAV DA	431-1⅜ 423 (500-1⅜)			
LNAV MDA	600-1 592 (600-1)		600-1¾ 592 (600-1¾)	
CIRCLING	600-1 592 (600-1)		700-2 692 (700-2) 820-2¾ 812 (900-2¾)	

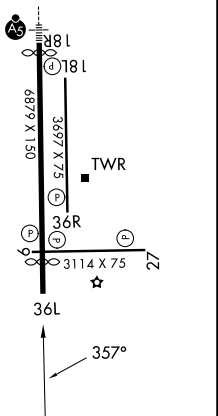

SC-4, 27 NOV 2025 to 25 DEC 2025

SC-4, 27 NOV 2025 to 25 DEC 2025