


ATIS 134.925 397.9		[USAF]								OGDEN, UTAH		
TOWER		Rwy	Knots	60	120	180	240	300	360			
127.15 263.15		14	V/V(fpm)	2095	4190	6285	8380	10475	12570			
SALT LAKE CITY		32	V/V(fpm)	4610	9220	13830	18440	23050	27660			
DEP CON		ATC Climb Rate to 5200										
121.1 319.25												
CLOVER CON												
134.1 285.65												

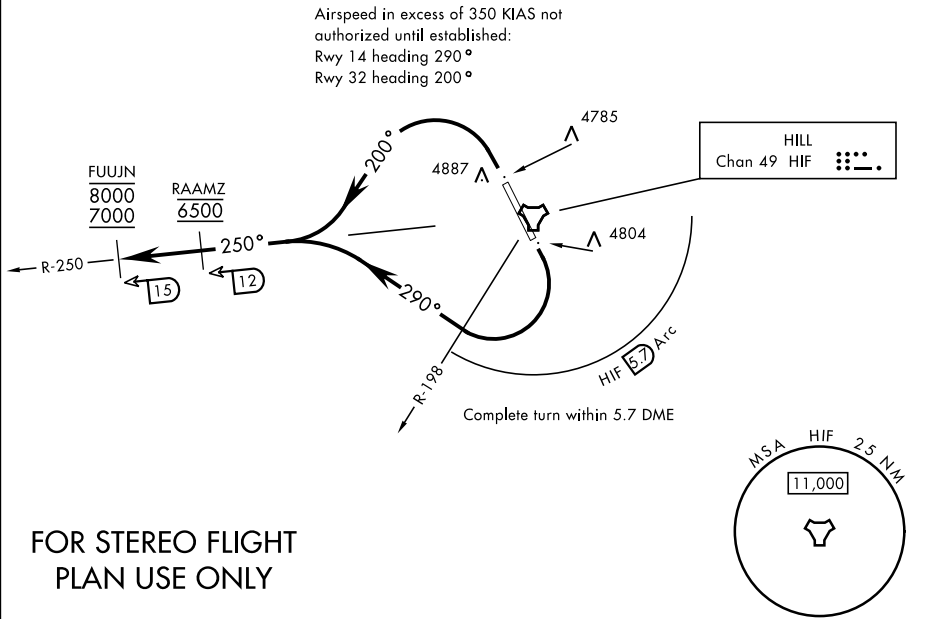

FOR STEREO FLIGHT
PLAN USE ONLY

EMERG SAFE ALT 100 NM 15,700

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Turn right heading 290°, remain within HIF TACAN 5.7 DME until passing the HIF R-198 and established on a heading greater than 256°, intercept HIF R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.

TAKEOFF RWY 32: Turn left heading 200°, intercept HIF TACAN R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.