
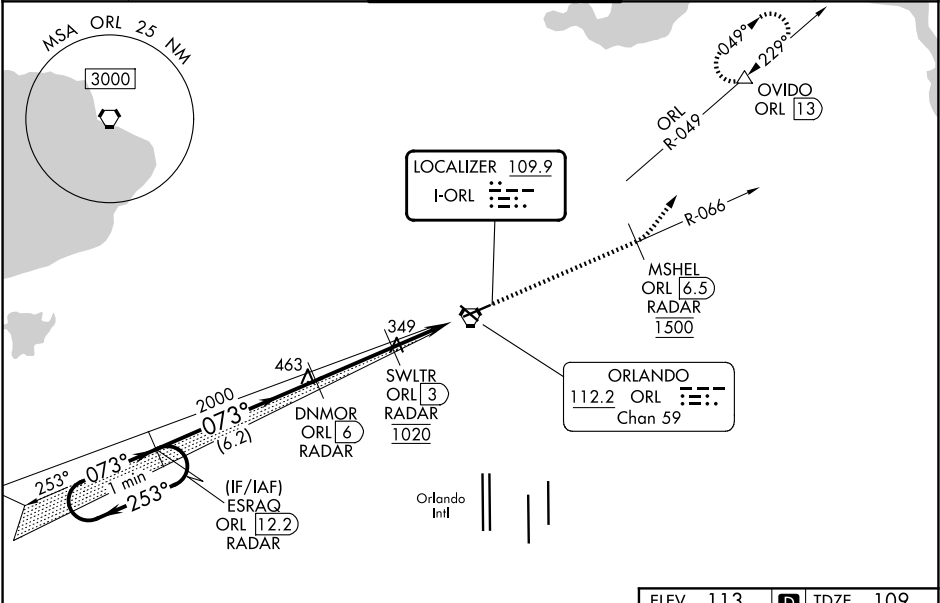



















































LOC I-ORL	APP CRS	Rwy Ldg	5604
109.9	073°	TDZE	109
		Apt Elev	113

ILS or LOC RWY 7
ORLANDO EXEC (ORL)

RADAR required for procedure entry. DME or RADAR required.		MALSR 	MISSED APPROACH: Climb on ORL VORTAC R-066 to cross MSHEL/ORL 6.5 DME/RADAR at 1500 then climbing left turn to 1600 on heading 020° and ORL VORTAC R-049 to OVIDO/ORL 13 DME and hold.	
▼ ▲ Circling Rwy 31 NA at night. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights. For inop ALS, increase S-ILS 7 all Cats visibility to RVR 4500 and S-LOC 7 Cats A/B visibility to RVR 5500. Rwy 7 helicopter visibility reduction below ¾ SM NA. Autopilot coupled approach NA below 320.				
ATIS 127.25	ORLANDO APP CON 119.4 351.9 (7) 125.225 351.9 (25)	EXECUTIVE TOWER ★ 118.7(CTAF) 0 239.0	GND CON 121.4 239.0	UNICOM 122.95



ELEV 113		TDZE 109	
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025