

WAAS CH 82712 W11A	APP CRS 112°	Rwy Ldg 4808 TDZE 1487 Apt Elev 1497
--	------------------------	---

RNAV (GPS) RWY 11

EASTERN OREGON RGNL AT PENDLETON (PDT)

RNP APCH.


▼

⚠

Baro-VNAV and VDP NA when using Walla Walla altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Walla Walla altimeter setting and increase all DA/MDA 120 feet; VNAV all Cats visibility 1⁄8 SM, LNAV Cat C visibility 3⁄8 SM, and Cat D visibility 1⁄8 SM, Circling Cat C visibility 1⁄4 SM and Circling Cat D visibility 1⁄2 SM.

MISSED APPROACH:
Climb to 5000 direct
ADXAB and on track
007° to ZUTED and hold.

ASOS 118.325	SPOKANE APP CON ★ 133.15 379.15	PENDLETON TOWER ★ 119.7 (CTAF) 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

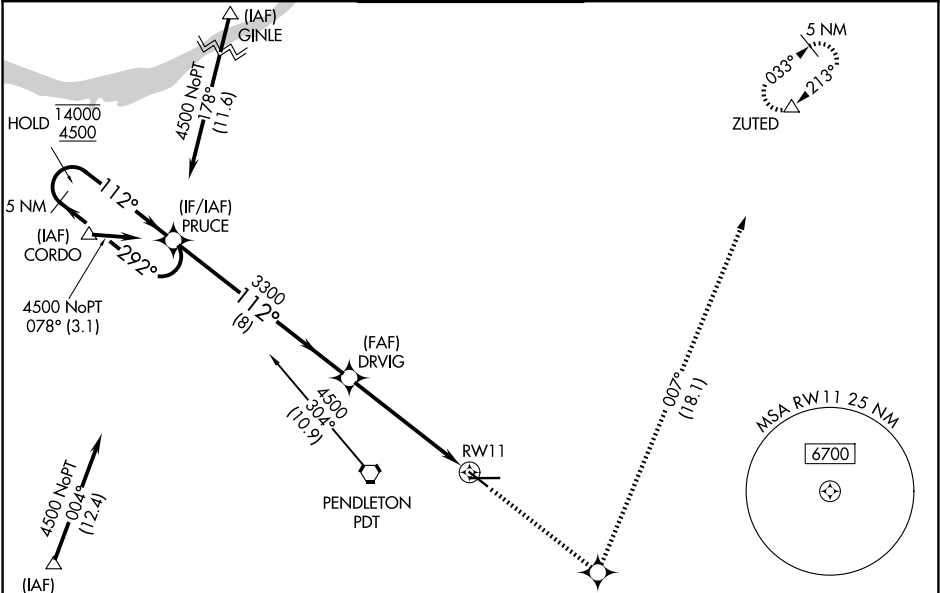

5 NM Holding Pattern		5000 ↑		ADXAB ✧	ZUTED △
PRUCE		5000		ADXAB	ZUTED
14000 ← 292°		5000		ADXAB	ZUTED
4500 → 112°		5000		ADXAB	ZUTED
GP 3.00°		5000		ADXAB	ZUTED
TCH 43		5000		ADXAB	ZUTED
8 NM		5000		ADXAB	ZUTED
4.5 NM		5000		ADXAB	ZUTED
1 NM		5000		ADXAB	ZUTED
CATEGORY	A	B	C	D	
LPV DA	1737-1		250 (300-1)		
LNAV/VNAV DA	1850-1¼		363 (400-1¼)		
LNAV MDA	1860-1		373 (400-1)		
CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1980-1½ 483 (500-1½)	2200-2¼ 703 (800-2¼)	

ELEV 1497

TDZE 1487

REIL Rwy 11 and 29

MRL Rwy 11-29

HIRL Rwy 8-26