


APP CRS 087°	Rwy Ldg 12000 TDZE 21 Apt Elev 36
------------------------	--

RNAV (RNP) Z RWY 9R
PHILADELPHIA INTL (PHL)


RNP AR APCH - GPS.  For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.16 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to 1½ SM.		ALSF-2 	MISSED APPROACH: Climb to 3000 on track 087° to ASGEW and on track 169° to CIPOK, and on track 259° to OOD VORTAC and hold.
D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6

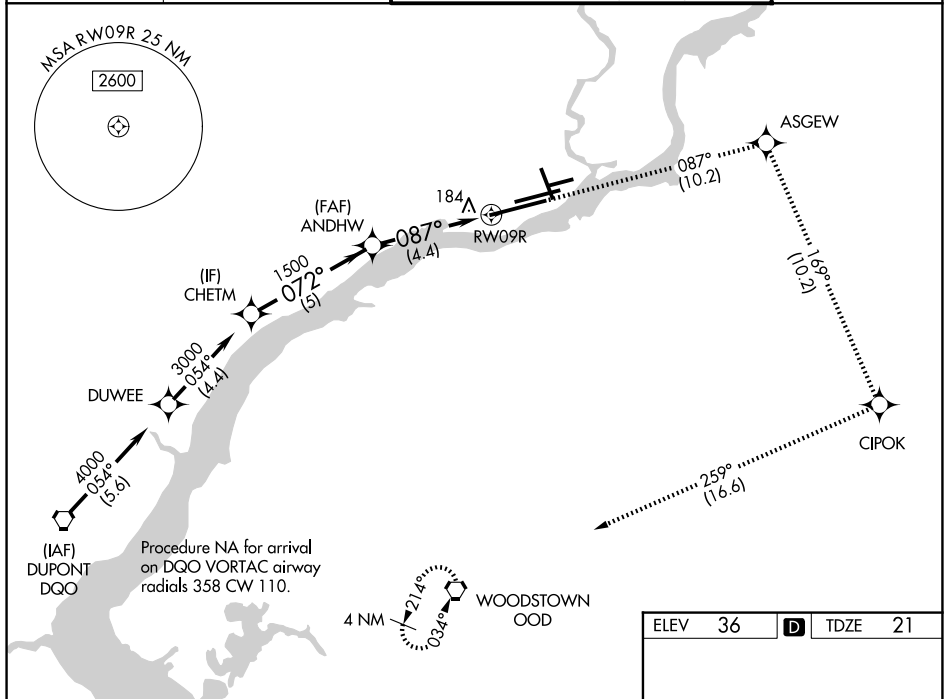

3000	tr 087°	ASGEW	tr 169°	CIPOK	tr 259°	OOD
------	---------	-------	---------	-------	---------	-----

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 72).

CATEGORY	A	B	C	D
RNP 0.16 DA		424/40	403 (400-¾)	
RNP 0.30 DA		461/50	440 (500-1)	

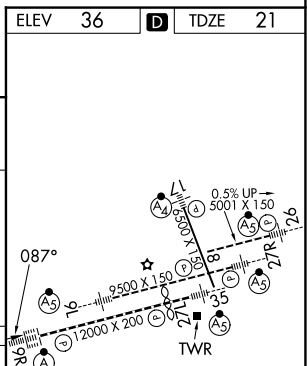

AUTHORIZATION REQUIRED

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35