

25331

RNAV (GPS) Y RWY 26
PHOENIX SKY HARBOR INTL (PHX)



T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 1700 then climbing right turn to 6000 direct RAXEE and hold.


D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)
--------------------------	--	---	---

(IAF)
ZERLO


7000
188°
(9.8)



ELEV 1135	D	TDZE 1135
-----------	----------	-----------



HIRL Rwy 8-26, 7L-25R and 7R-25L
REIL Rwy 26

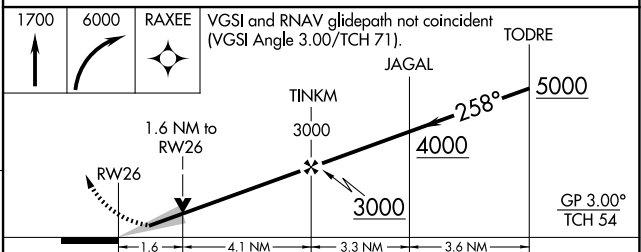

CATEGORY	A	B	C	D
LPV DA	1390-3 $\frac{3}{4}$ 255 (300-3 $\frac{3}{4}$)			
LNAV/VNAV DA	1581-1 $\frac{3}{8}$ 446 (500-1 $\frac{3}{8}$)			
LNAV MDA	1700-1 565 (600-1)		1700-1 $\frac{5}{8}$ 565 (600-1 $\frac{5}{8}$)	
CIRCLING	1740-1 605 (700-1)		2040-2 $\frac{3}{4}$ 905 (1000-2 $\frac{3}{4}$)	2340-3 1205 (1300-3)

PHOENIX SKY HARBOR INTL (PHX)
RNAV (GPS) Y RWY 26