

WAAS CH 65626 W29A	APP CRS 290°	Rwy Ldg 7200 TDZE 56 Apt Elev 76
--	------------------------	---

RNAV (GPS) RWY 29
PORTLAND INTL JETPORT (PWM)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cat C/D visibility to 1¾ mile.
A **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 3000 direct BUXTO and hold, continue climb-in-hold to 3000.

ATIS 119.05	PORTLAND APP CON ★ 119.75 269.35	PORTLAND TOWER ★ 120.9 0 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

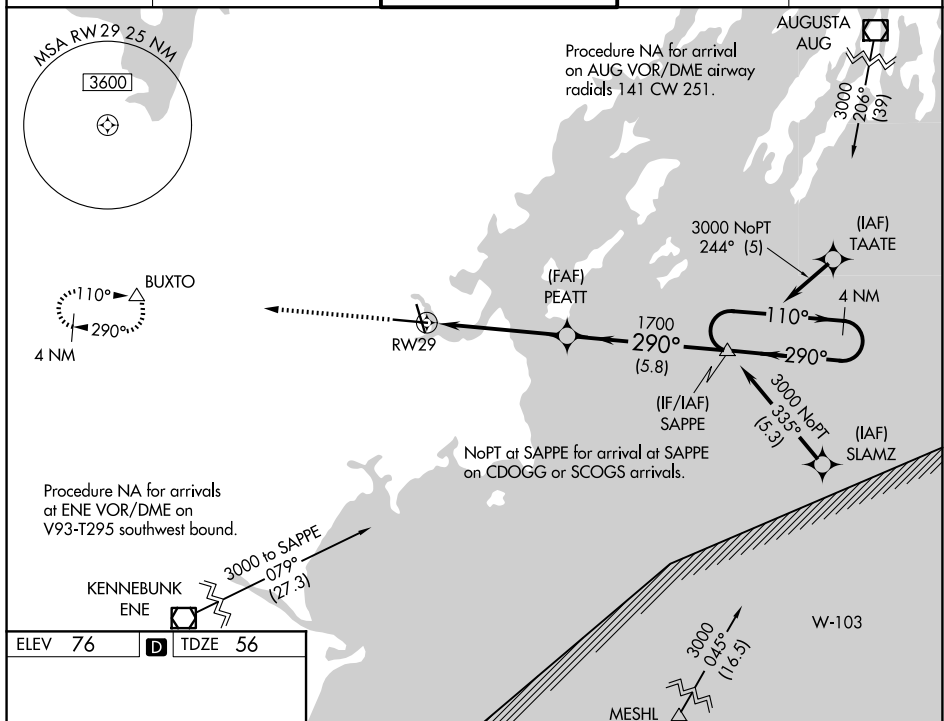

ELEV 76	D	TDZE 56
---------	----------	---------



TDZL/RCLS Rwy 11 **L**
MIRL Rwy 18-36 **L**
HIRL Rwy 11-29 **L**
REIL Rwy 18 and 36 **L**

[illegible]