

LOC/DME I-PDX <u>110.5</u> Chan 42	APP CRS 103°		10R	10L
		Rwy Ldg	11000	8535
		TDZE	24	30
		Apt Elev	31	31

ILS or LOC RWY 10R

PORTLAND INTL (PDX)

⚠

Simultaneous approach authorized. Inop table does not apply to Sidestep LOC 10L. For inop ALS increase S-ILS 10R Cat E visibility to RVR 4000. For inop ALS increase S-LOC 10R Cat C/D/E visibility to 2½ SM. For inop ALS increase JADNU fix minimums S-LOC 10R Cat C/D/E visibility to RVR 6000. Sidestep NA until passing JADNU.

ALSF-2

Rwy 10R


MALSR

Rwy 10L

MISSED APPROACH:

Climb to 1100 then climbing right turn to 5000 on BTG VORTAC R-160 to MULES/ BTG 17.7 DME and hold, continue climb-in-hold to 5000.

D-ATIS	PORTLAND APP CON	PORTLAND TOWER	GND CON
128.35 269.9	124.35 299.2	118.7 257.8 (10L-28R) 123.775 251.125 (3-21, 10R-28L)	121.9 348.6

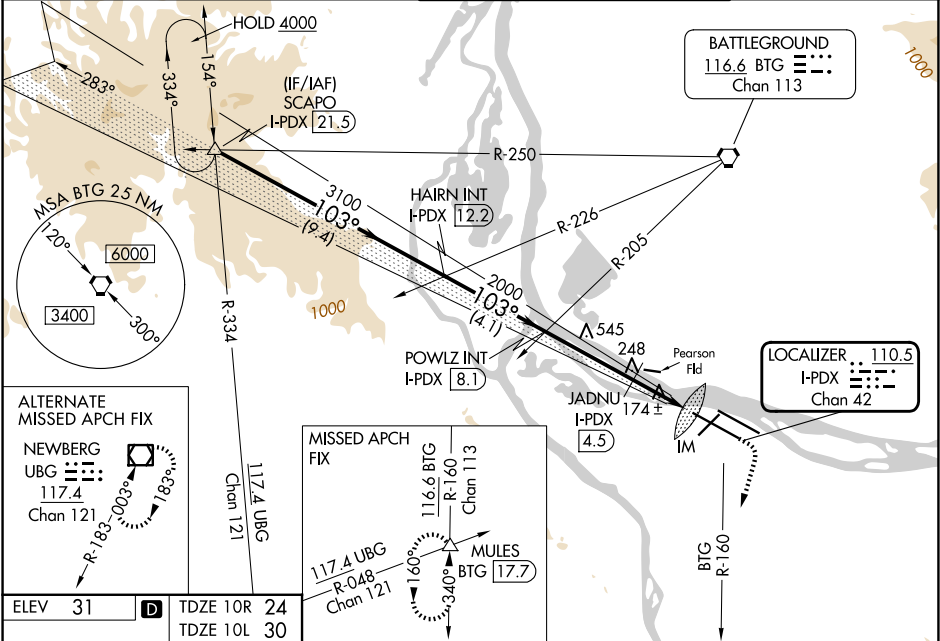

ELEV	31	TDZE 10R	24
		TDZE 10L	30

SCAPO I-PDX [21.5]

HAIRN INT I-PDX [12.2]

POWLZ INT I-PDX [8.1]

JADNU I-PDX [4.5]

*I-PDX [3.1]

4000

3100

2000

2000

860

1100

5000

MULES

GS 3.00°

TCH 53

9.4 NM

4.1 NM

3.6 NM

1.4

1 NM

0.1

CATEGORY	A	B	C	D	E
S-ILS 10R	224/18 200 (200-½)				
S-LOC 10R	860/24 836 (900-½)	860/40 836 (900-¾)	860-17½ 836 (900-17½)		
CIRCLING	860-1¼ 829 (900-1¼)		1060-3 1029 (1100-3)		1140-3 1109 (1200-3)
JADNU FIX MINIMUMS					
S-LOC 10R	440/24 416 (500-½)		440/40 416 (500-¾)		
SIDESTEP 10L	800-1 770 (800-1)	800-1¼ 770 (800-1¼)	800-2½ 770 (800-2½)		800-2¾ 770 (800-2¾)

REIL Rwy 3 and 21

TDZL/RCLS Rwy 10R

MIRL Rwy 3-21

HIRL Rwy 10L-28R and 10R-28L

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00