


WAAS CH 82514 W23A	APP CRS 226°	Rwy Ldg 7031 TDZE 3067 Apt Elev 3080
--	------------------------	---

RNAV (GPS) Y RWY 23

ROBERTS FLD (RDM)

T A ❄️	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV Cat C/D visibility to 1 SM.	MALSR 	MISSED APPROACH: Climb to 8500 direct WELPU and on track 138° to URBIA and hold, continue climb-in-hold to 8500.
---	---	--	---

ATIS 119,025	SEATTLE CENTER 126.15 269,475	REDMOND TOWER★ 124.5 (CTAF) 0 256.8	GND CON 121.8	UNICOM 122.95
-----------------	----------------------------------	--	------------------	------------------

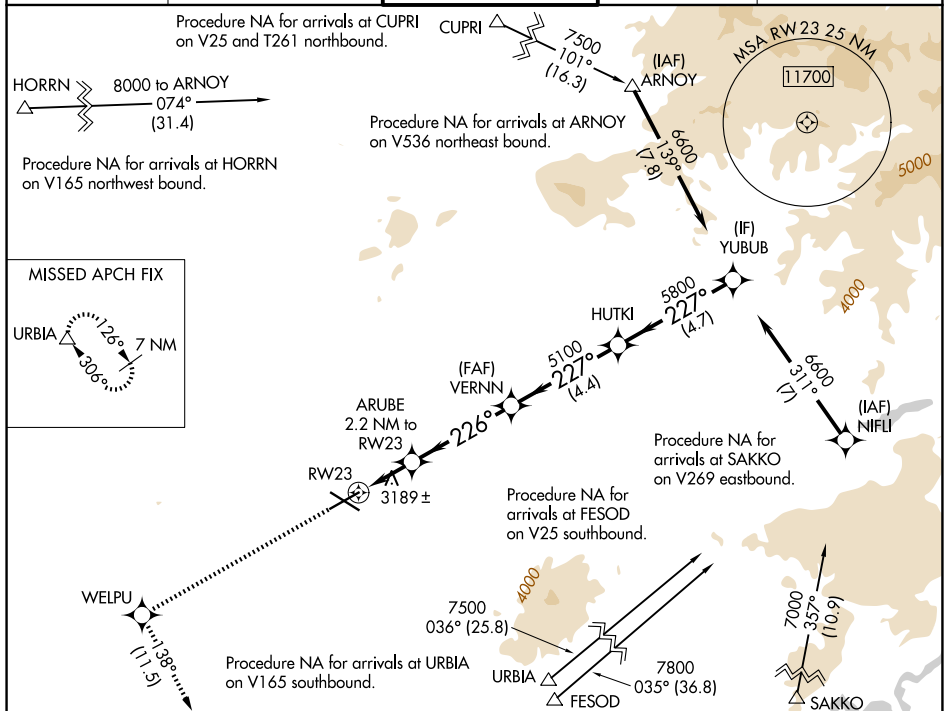

ELEV 3080 TDZE 3067

226°

0.5% UP

0.3% UP

7006 X 150

7006 X 100

7038 X 150

TWR

GP 3.00° TCH 47

8500 WELPU tr 138° URBIA VGSB and RNAV glidepath not coincident (VGSB Angle 3.00/TCH 51)

VERNN HUTKI YUBUB

ARUBE 2.2 NM to RW23

RW23

1.1 NM 1.1 NM 4.1 NM 4.4 NM 4.7 NM

CATEGORY	A	B	C	D
LPV DA	3267- $\frac{1}{2}$	200 (200- $\frac{1}{2}$)		
RNAV/VNAV DA	3383- $\frac{5}{8}$	316 (400- $\frac{5}{8}$)		
RNAV MDA	3440- $\frac{1}{2}$	373 (400- $\frac{1}{2}$)	3440- $\frac{3}{4}$	373 (400- $\frac{3}{4}$)
CIRCLING	3540-1 460 (500-1)	3560-1 480 (500-1)	3640-1 $\frac{1}{2}$ 560 (600-1 $\frac{1}{2}$)	3760-2 $\frac{1}{4}$ 680 (700-2 $\frac{1}{4}$)