


LOC/DME I-ROW	APP CRS	Rwy Ldg
109.9	215°	13000
Chan 36		TDZE
		3633
		Apt Elev
		3671

ILS Z or LOC Z RWY 21


ROSWELL AIR CENTER (ROW)

ADF or DME required.	MALSR	MISSED APPROACH: Climb to 5000 then climbing right turn to 6000 on CME VORTAC R-195 to CME VORTAC and hold, continue climb-in-hold to 6000.
VDP NA when using Artesia altimeter setting. When local altimeter setting not received, use Artesia altimeter setting: increase DA to 3913 feet; increase all MDAs 80 feet and S-LOC 21 visibility Cat C/D ¾ SM and Circling visibility Cat D ¼ SM. For inop ALS when using Artesia altimeter setting, increase ILS all Cats visibility to ¾ SM and LOC Cats C/D to 1 ¾ SM.	AG	

ATIS	ROSWELL APP CON*	ROSWELL TOWER*	GND CON	CLNC DEL	UNICOM
128.45 306.2	119.6 239.0	118.5(CTAF) 0 233.7	121.9 348.6	132.875 282.25	122.95

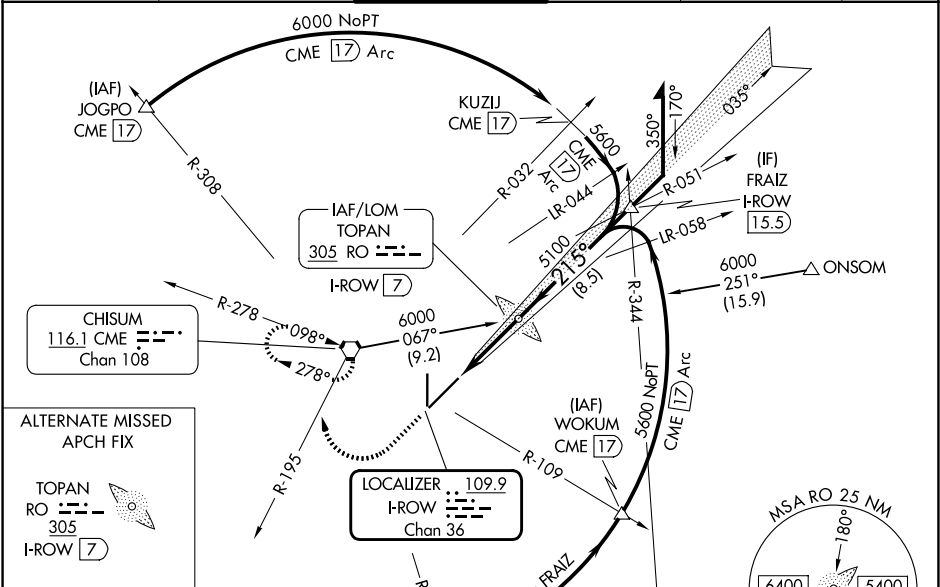

ELEV 3671	D	TDZE 3633
-----------	---	-----------

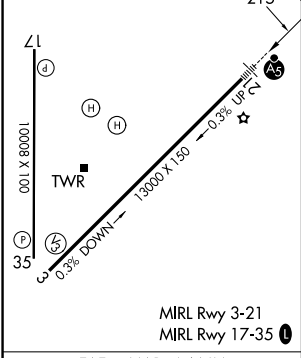

CATEGORY	A	B	C	D
S-ILS 21	3833-½	200 (200-½)		
S-LOC 21	4020-½	387 (400-½)	4020-⅝	387 (400-⅝)
CIRCLING	4140-1	469 (500-1)	4140-1½	4300-2
			469 (500-1½)	629 (700-2)