


WAAS CH 70402 W35A	APP CRS 350°	Rwy Ldg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--



RNAV (GPS) RWY 35
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.	
▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM, and Circling Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.	MISSED APPROACH: Climb to 6000 direct HOGIG and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

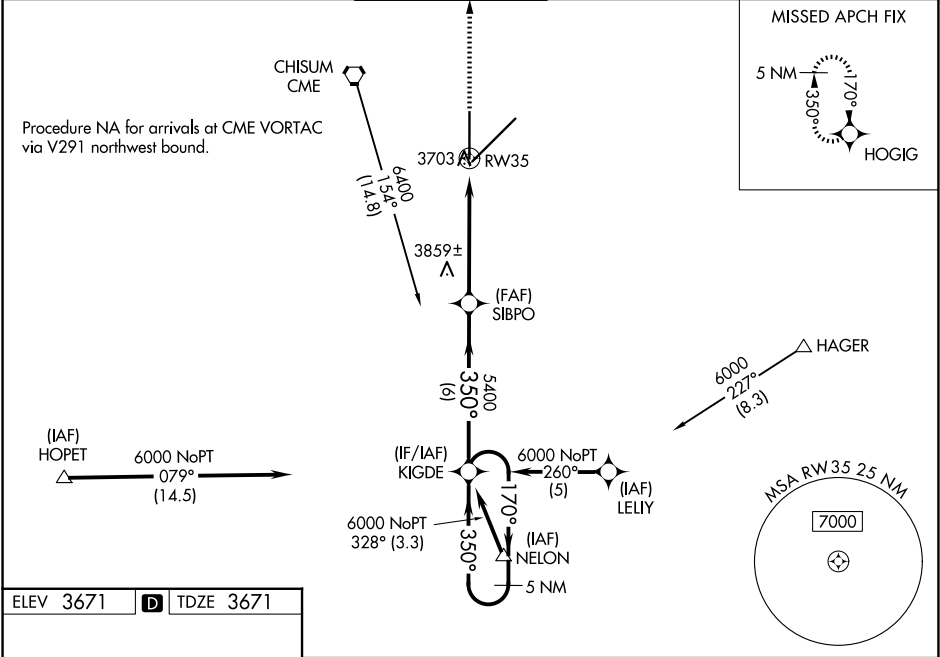

ELEV 3671	D	TDZE 3671
-----------	---	-----------

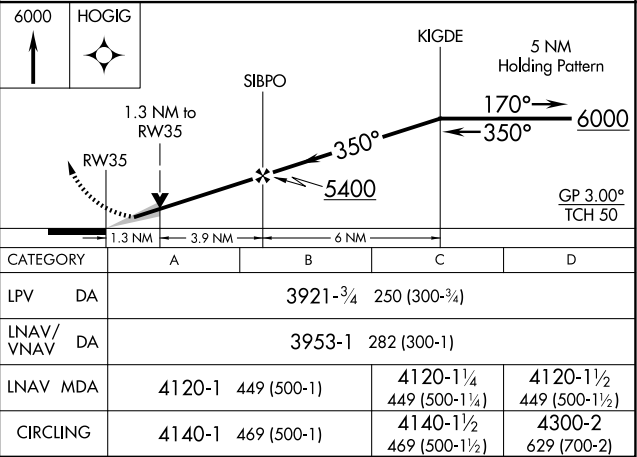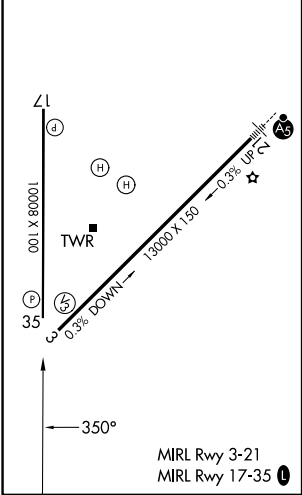

SW-1, 27 NOV 2025 to 25 DEC 2025

SW-1, 27 NOV 2025 to 25 DEC 2025