
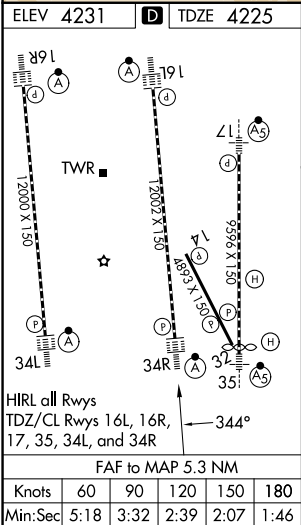


LOC/DME I-SLC 109.5 Chan 32	APP CRS 344°	Rwy Ldg TDZE 4225 Apt Elev 4231
---	------------------------	---

ILS or LOC RWY 34R
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From QWENN or JAZZZ.		ALSF-2 	MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold.
DME required for LOC only. DME or RADAR required.			
▼ Simultaneous approach authorized. For inop ALS, increase S-LOC 34R Cat C/D visibility to RVR 5500.			

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 119.05 257.8	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

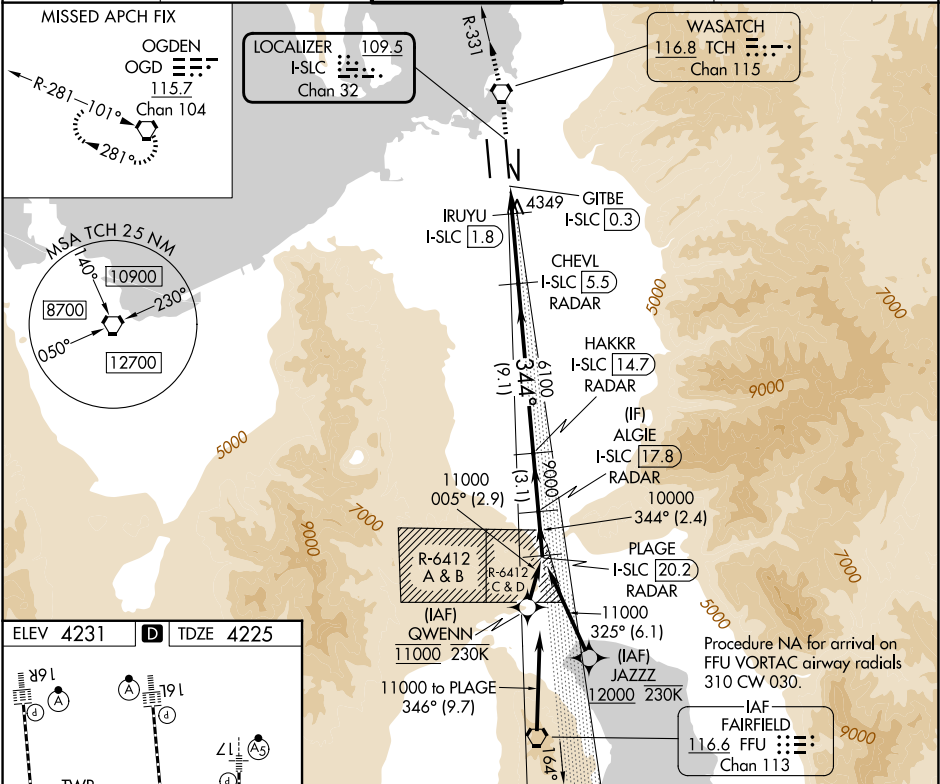

ELEV 4231 TDZE 4225		9000 TCH OGD		VGS and ILS glidepath not coincident (VGS Angle 3.00/TCH 73).		PLAGE
						ALGIE I-SLC [20.2]
TCH R-331		CHEVL I-SLC [5.5]		HAKKR I-SLC [14.7]		RADAR
I-SLC DME ANTENNA		IRUYU I-SLC [1.8]		GITBE I-SLC [0.3]		RADAR
CATEGORY		A		B		C
S-ILS 34R		4425/18		200 (200-1/2)		D
S-LOC 34R		4600/24		375 (400-1/2)		4600/35 375 (400-3/8)