

APP CRS 164°	Rwy Ldg 12000 TDZE 4226 Apt Elev 4231
------------------------	--

RNAV (RNP) Z RWY 16R
SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS. Authorization required. From LAWVA: RF.

T For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000, and increase RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2




MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 direct STACO and hold.

*Missed approach requires minimum climb of 339 feet per NM to 4680.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6	127.3 379.975	

MISSED APCH FIX





(IF)
RRUFF
230K

SEE INSET FOR
ROUTING TO
RRUFF

(IAF)
EKKHO
1000 250K


(IAF)
WEBER
12000

ROUTING
TO RRUFF
(not to scale)

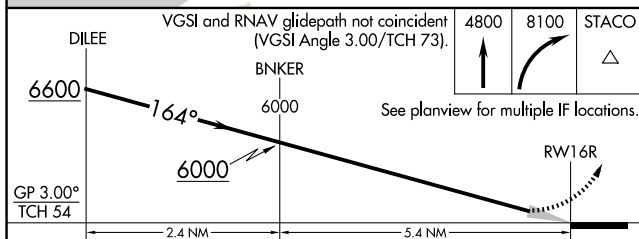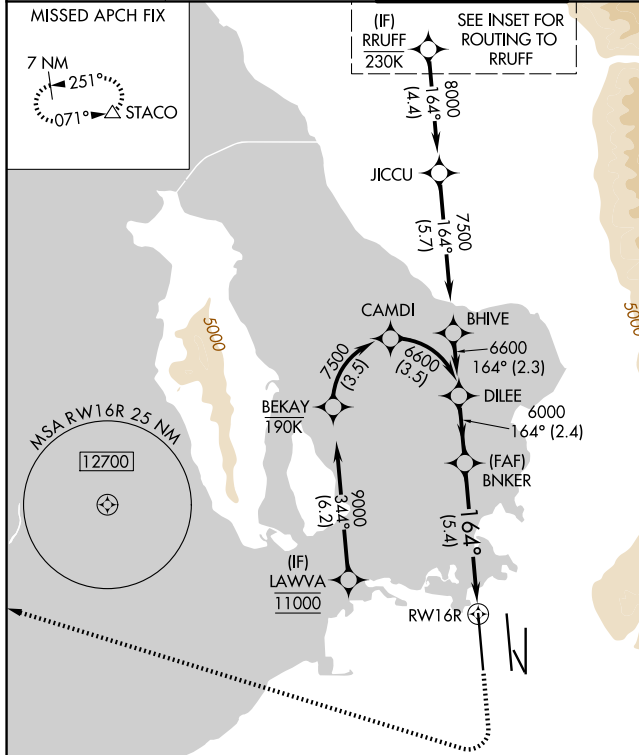

CATEGORY	A	B	C	D
RNP 0.10 DA*		4481/24	255 (300- $\frac{1}{2}$)	
RNP 0.30 DA		4597/35	371 (400- $\frac{5}{8}$)	

AUTHORIZATION REQUIRED

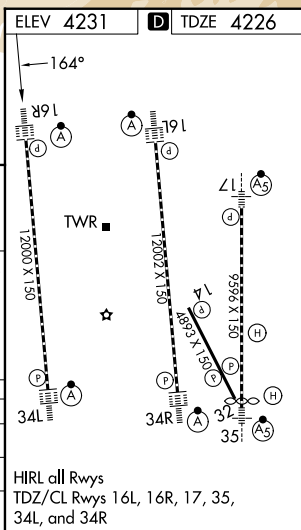

RNAV (RNP) Z RWY 16R