

WAAS CH 77517 W03A	APP CRS 038°	Rwy Ldg TDZE 1917 Apt Elev 1919
--	------------------------	---


RNAV (GPS) RWY 3
SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.
ASR # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR MISSED APPROACH:
Climb to 3800 direct LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 0 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

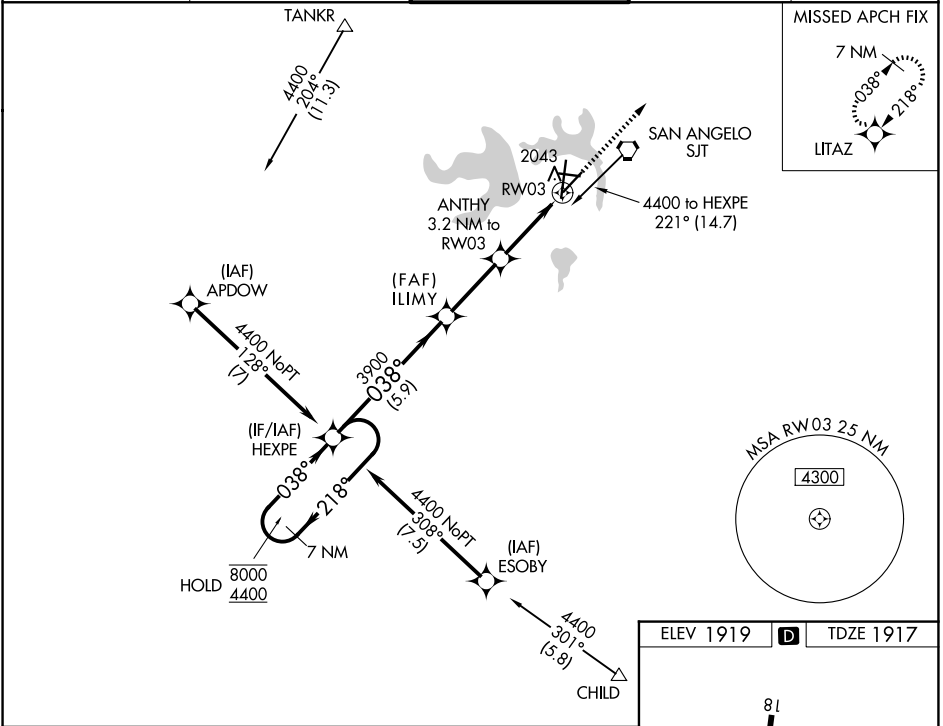

7 NM Holding Pattern		HEXPE		ILIMY		ANTHY 3.2 NM to RW03		3800		LITAZ	
8000 ← 218°		4400 ← 038°		038°		3900		*3000		*LNAV only.	
GP 3.00° TCH 51		5.9 NM		2.8 NM		2.2 NM		1 NM		RW03	
CATEGORY	A	B	C	D	E						
LPV DA #	2117/24		200 (200-½)								
LNAV/VNAV DA	2323/35		406 (500-¾)								
LNAV MDA	2300/24	383 (400-½)	2300/35		383 (400-¾)						
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)						

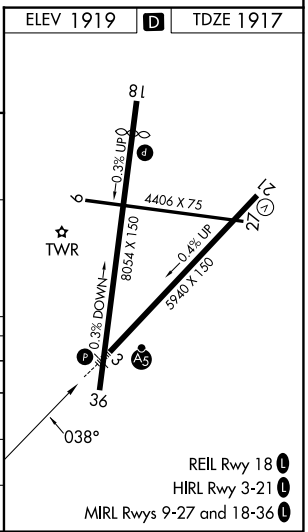

SC-3, 27 NOV 2025 to 25 DEC 2025

SC-3, 27 NOV 2025 to 25 DEC 2025