

## TJANO TWO DEPARTURE (RNAV)

SAN ANTONIO DEP CON  
125.7 290.225  
ATIS  
128.8  
CLNC DEL (When twr closed)  
121.7  
GND CON  
121.7 379.9  
STINSON TOWER ★  
118.2 379.9

RNAV 1 - DME/DME IRU or GPS.

RADAR required for non-GPS equipped aircraft.  
RADAR required.

**TOP ALTITUDE:  
ASSIGNED BY ATC**


## TAKEOFF MINIMUMS

Rwy 10: Standard with minimum climb of 230'/NM to 1900.

Rwy 14: Standard with minimum climb of 220'/NM to 1900.

Rwy 28: 300-1½ or standard with minimum climb of 230'/NM to 900, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1800' prior to DER.

Rwy 32: Standard with minimum climb of 230'/NM to 1700.

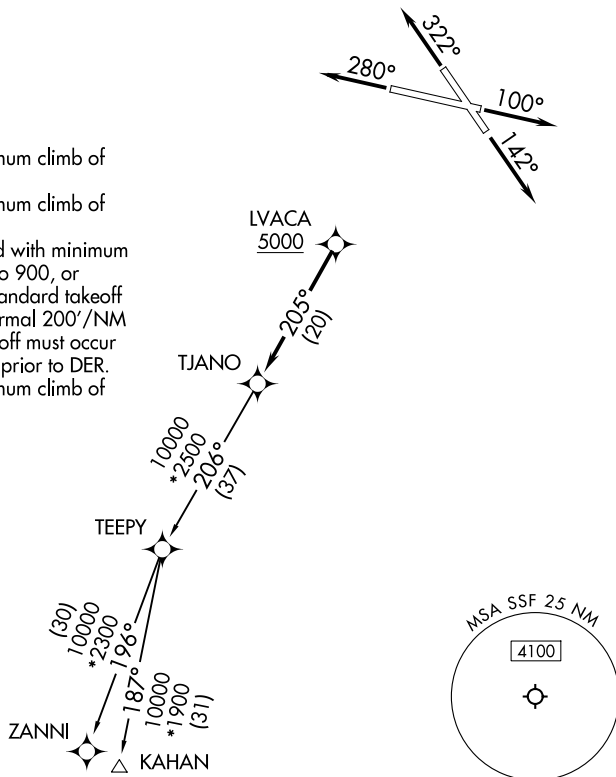

NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 10:** Climb on heading 100° or as assigned by ATC, for vectors to LVACA, thence. . .

**TAKEOFF RUNWAY 14:** Climb on heading 142° or as assigned by ATC, for vectors to LVACA, thence. . .

**TAKEOFF RUNWAY 28:** Climb on heading 280° or as assigned by ATC, for vectors to LVACA, thence. . .

**TAKEOFF RUNWAY 32:** Climb on heading 322° or as assigned by ATC, for vectors to LVACA, thence. . .

...on track 205° to TJANO, then on transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

### KAHAN TRANSITION (TJANO2.KAHAN)

ZANNI TRANSITION (TJANO2.ZANNI)

## TJANO TWO DEPARTURE (RNAV)

(TJANO2.TJANO) 07AUG25

SAN ANTONIO, TEXAS  
STINSON MUNI (SSF)