


LOC BC RWY 2L
JOHN WAYNE/ORANGE COUNTY (SNA)


MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER* 126.8 (CTAF) 0 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	--	-------------------------	-------------------------

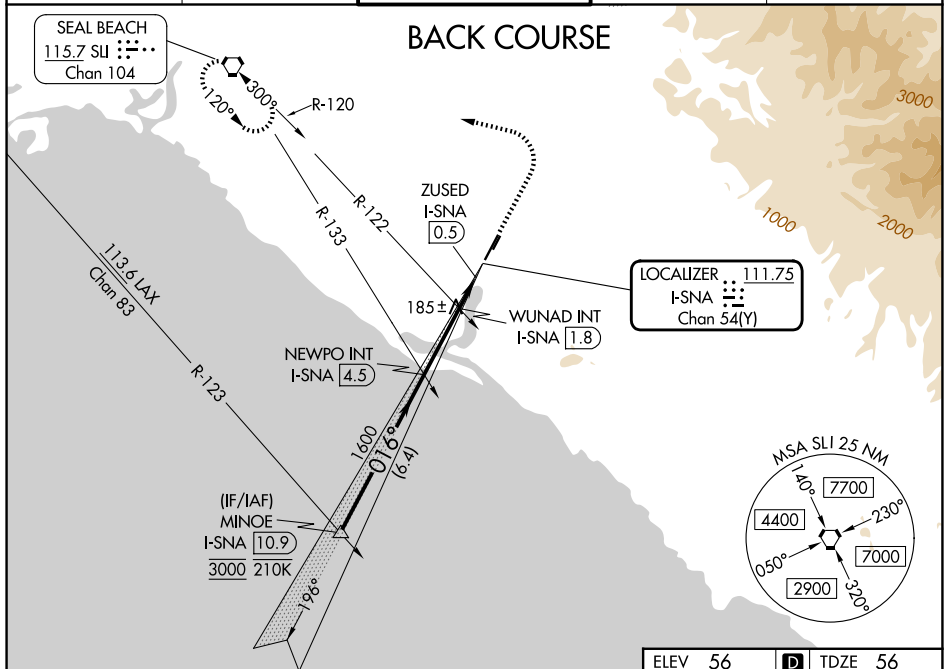

ELEV 56	D	TDZE 56
---------	----------	---------

REIL Rwy 20L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R

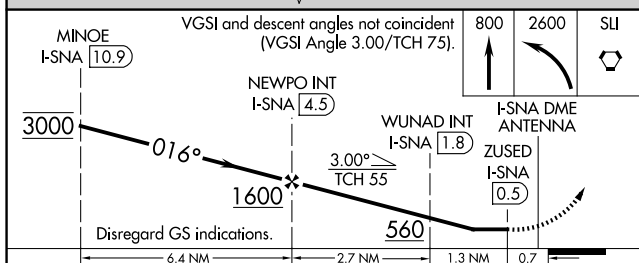

CATEGORY	A	B	C	D
S-LOC 2L	560-1	504 (600-1)	560-1 $\frac{3}{8}$	504 (600-1 $\frac{3}{8}$)
CIRCLING	640-1	584 (600-1)	840-2 $\frac{1}{4}$ 784 (800-2 $\frac{1}{4}$)	1180-3 1124 (1200-3)
WUNAD FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 2L	480-1	424 (500-1)	480-1 $\frac{1}{4}$	424 (500-1 $\frac{1}{4}$)
CIRCLING	640-1	584 (600-1)	840-2 $\frac{1}{4}$ 784 (800-2 $\frac{1}{4}$)	1180-3 1124 (1200-3)

