

WAAS CH 77927 W12A	APP CRS 121°	Rwy Ldg TDZE 230 Apt Elev 261
--	------------------------	---

RNAV (GPS) RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

⚠ Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using San Luis Obispo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase LPV DA to 489 feet; increase LNAV/VNAV DA to 622 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500. For inop MALSR, increase LNAV Cat C/D visibility to 1½ mile.
RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Vandenberg altimeter setting.

MALSR

MISSED APPROACH:
Climb to 800 then
climbing left turn to
5000 direct MQO
VORTAC and hold.

ATIS 121.15	SANTA BARBARA APP CON★ 124.15 327.8	SANTA MARIA TOWER★ 118.3 (CTAF) 239.25	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

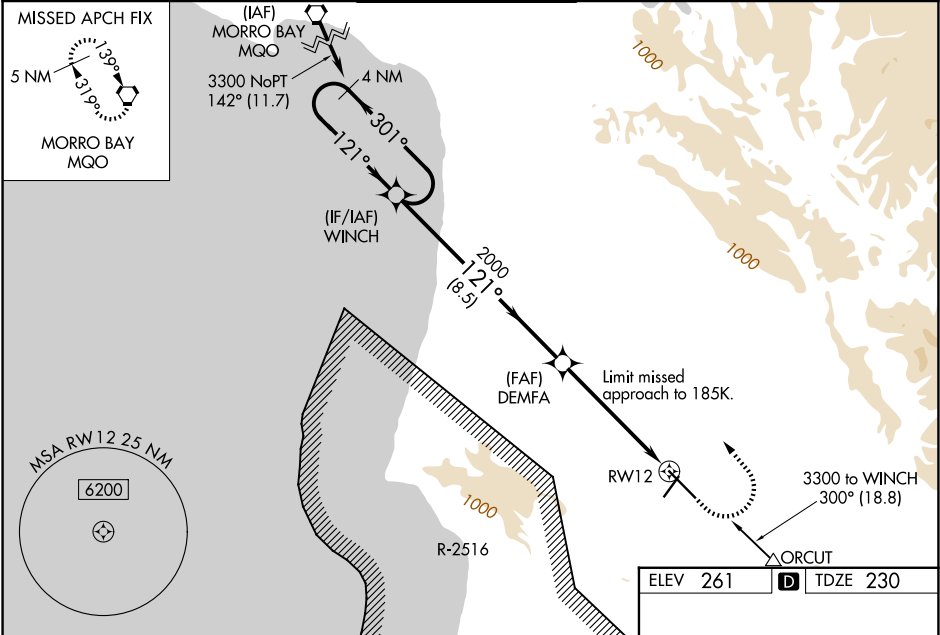

4 NM

Holding Pattern

WINCH

DEMFA

800

↑

5000

↶

MQO

⬡

3300

← 301°

121° →

121°

2000

2000

*1.3 NM to RW12

*LNAV only

GP 3.00°

TCH 55


8.5 NM

4.2 NM

1.3 NM

RW12

CATEGORY	A	B	C	D
LPV DA#	430/24 200 (200-½)			
LNAV/VNAV DA	563/32 333 (400-⅝)			
LNAV MDA	680/24 450 (500-½)	680/50 450 (500-1)		
CIRCLING	860-1 599 (600-1)	1000-1 739 (800-1)	1420-3 1159 (1200-3)	1540-3 1279 (1300-3)

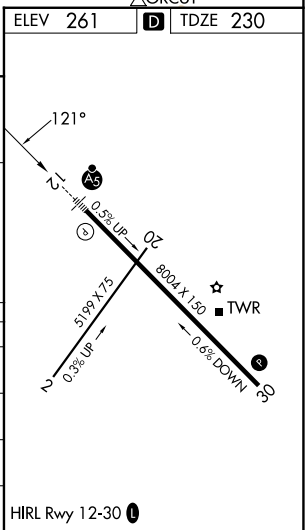

SW-3, 27 NOV 2025 to 25 DEC 2025

SW-3, 27 NOV 2025 to 25 DEC 2025