

VORTAC SAV

115.95

Chan 106 (Y)

APP CRS

181°

Rwy Ldg

7002

TDZE

47

Apt Elev

50


VOR/DME or TACAN RWY 19

SAVANNAH/HILTON HEAD INTL (SAV)

▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase all MDA 80 feet; increase S-19 Cats C/D visibility ¼ SM and Cat E visibility ½ SM; increase Circling Cats C/D visibility ¼ SM. VDP NA when using Hilton Head Island altimeter setting.

MISSED APPROACH: Climb to 800 then climbing left turn to 4000 via heading 330° and SAV R-001 to TILLS/20 DME and hold.

ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------	------------------------------------	---	------------------------	------------------

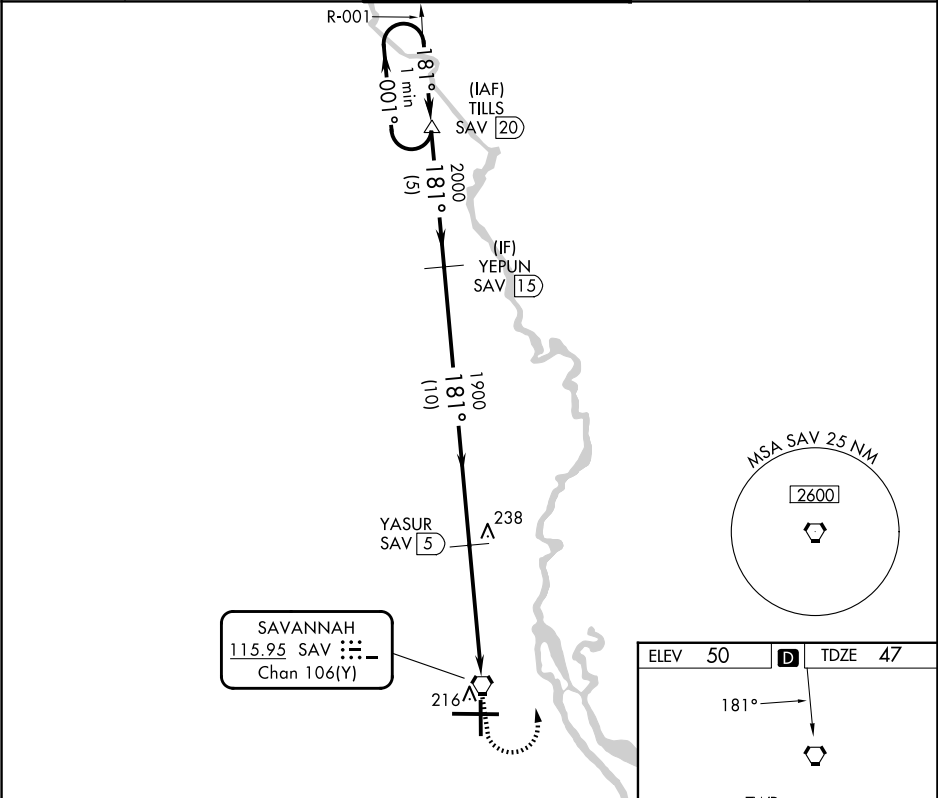

One Minute Holding Pattern

TILLS SAV 20

YEPUN SAV 15

YASUR SAV 5

SAV VORTAC

TILLS

3000

181°

2000

181°

1900

3.03°

TCH 52

800

4000

hdg 330°

SAV R-001

5 NM

10 NM

4.4 NM

0.7

0.6

CATEGORY	A	B	C	D	E
S-19	500-1	453 (500-1)	500-1¼ 453 (500-1¼)	500-1½	453 (500-1½)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)	900-3 850 (900-3)

ELEV 50

TDZE 47

181°

TWR

61

9351 X 150

0.5% UP

7002 X 150

1

TDZL/RCLS Rwy 10

REIL Rws 19 and 28

HIRL Rws 1-19 and 10-28