

ILS or LOC/DME RWY 12
SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD(BFF)

MALSR 	MISSED APPROACH: Climb to 4500 then climbing left turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.
--	--

APCH FIX

HAPRO
AIA [28]

ALTERNATE MISSED APCH FIX

111.8 AIA
R-242
Chan 55

062°
242°

6900 NoPT
126° (4.5)

(IAF)
WHARF
I-RMT [17.3]

((IF/IAF))
LEDSE
I-RMT [12.8]

126°
min
306°

5700
126°
(6.1)

CAPGA
I-RMT [6.7]

FERPO
I-RMT [1.8]

6900 to LEDSE
286°
(15.3)


065°
245°
R-065

SCOTTSBLUFF
112.6 BFF [M]
Chan 73

LOCALIZER [M]
110.35
I-RMT [M]
Chan 40(Y)

MSA BFF 25 NM
[M] 6400
180°
090°
[M] 6800

ELEV 3967 [D] TDZE 3963

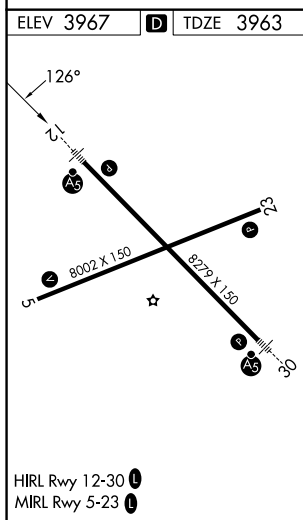

DME REQUIRED

ILS unusable from FERPO/1.8 DME inbound.

One Minute Holding Pattern

LEDSE
I-RMT 12.8

CAPGA
I-RMT 6.7

5700

5700

I-RMT 3.5

FERPO
I-RMT 1.8

6900 ← 306°
126° →

GS 3.00°
TCH 57

6.1 NM 3.2 NM 1.7 NM 0.3

CATEGORY	A	B	C	D
S-ILS 12	4163-½ 200 (200-½)			
S-LOC 12	4640-½ 677 (700-½)		4640-1½ 677 (700-1½)	4640-1¾ 677 (700-1¾)
CIRCLING	4640-1 673 (700-1)		4640-2 673 (700-2)	4740-2 ½ 773 (800-2½)