

WAAS CH 69435 W15A	APP CRS 149°	Rwy Ldg TDZE 166 Apt Elev 166	8014
--	------------------------	---	-------------


RNAV (GPS) RWY 15

CRAIG FLD (SEM)

⚠ Baro-VNAV NA when using Montgomery altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase all DA 78 feet, all MDA 80 feet, LPV all Cats visibility ¾ mile, LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 3100 direct
CADIP and hold.

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	CRAIG TOWER★ 120.85	GND CON 121.675	UNICOM 122.7 (CTAF) 0
---------------------------	--	-------------------------------	---------------------------	---------------------------------

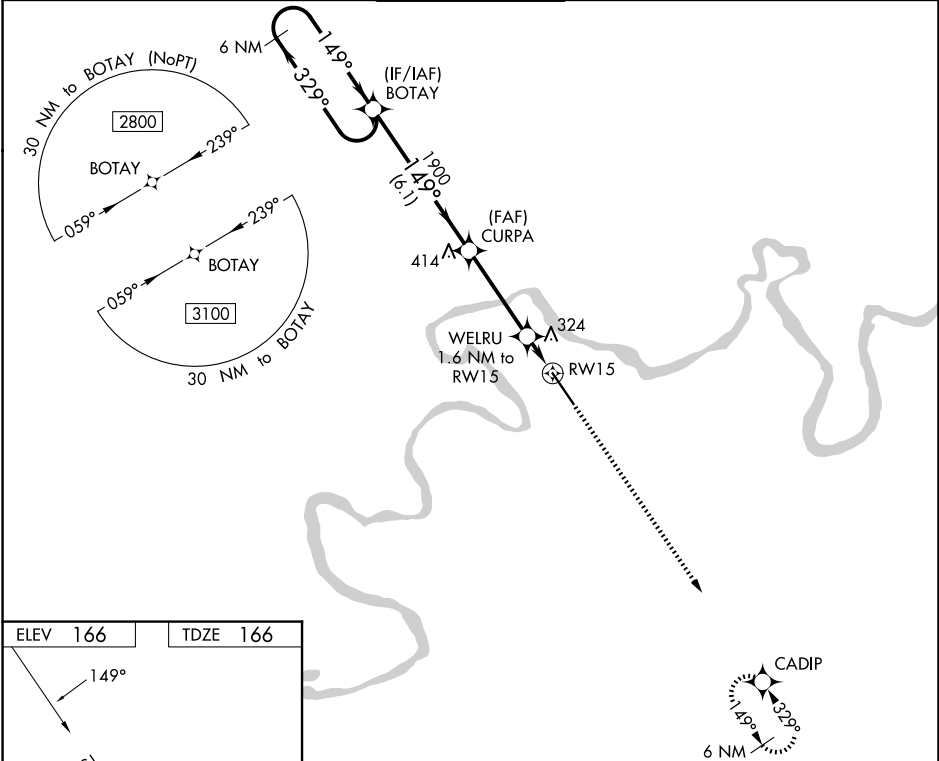

ELEV 166		TDZE 166	
6 NM Holding Pattern BOTAY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).	
2800 ← 329°		CURPA 1900	
GP 3.00° TCH 45		WELRU 1.6 NM to RW15	
		*1.1 NM to RW15	
		*720	
		*LNNAV only	
		RW15	
		6.1 NM	
		3.7 NM	
		0.5 NM	
		1.1 NM	
CATEGORY	A	B	D
LPV DA	416-¾ 250 (300-¾)		
LNAV/VNAV DA	569-1⅓ 403 (500-1⅓)		
LNAV MDA	560-1	394 (400-1)	560-1⅓ 394 (400-1⅓)
CIRCLING	660-1 494 (500-1)	760-1 594 (600-1)	760-1½ 1040-2¾ 874 (900-2¾)

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025