RNAV (RNP) Z RWY 1L
TAMPA INTL (TPA)

APP CRS	Rwy Ldg	10800
007°	TDZE	11
	Apt Elev	26

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.13 all Cats visibility to 4500 RVR.

ALSF-2

MISSED APPROACH: Climb to 2000 direct MERRA and hold.

ARR	D-ATIS	DEP	TAMPA APP CON	TAMPA TOWER	GND CON	CLNC DEL	CPDLC
126.45		128.475	118.5 307.175	119.5 269.4	121.7 269.4	133.6	

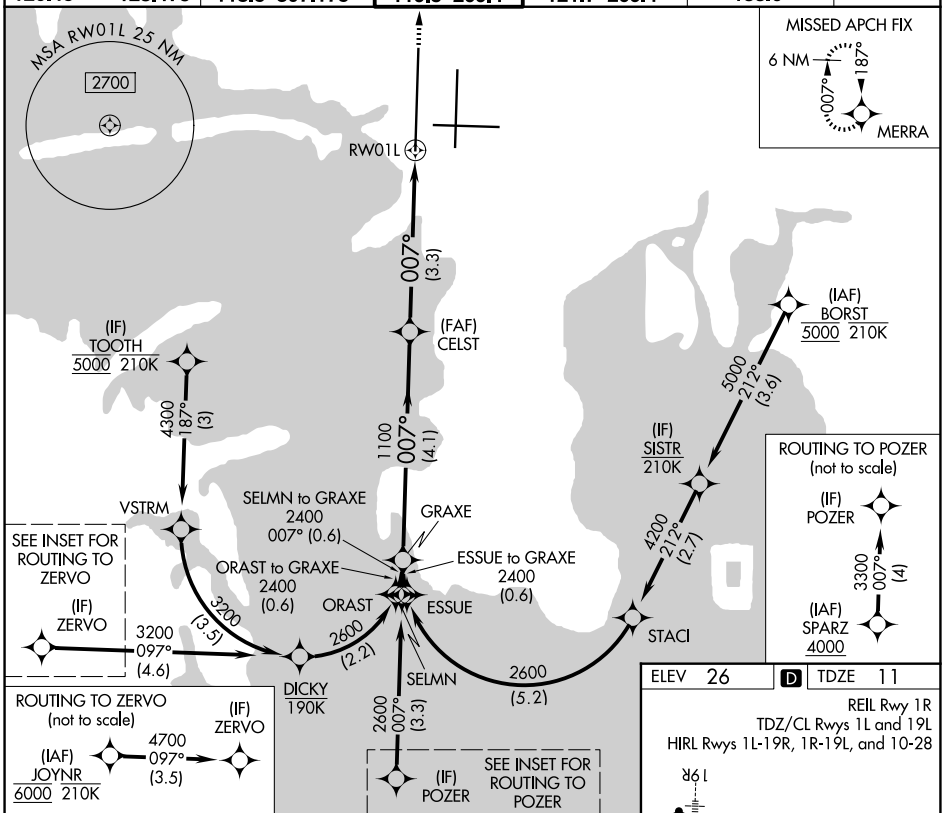

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

2000 MERRA

See planview for multiple IF locations.

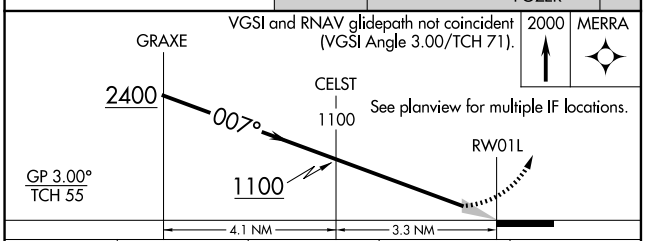

CATEGORY	A	B	C	D
RNP 0.13 DA	299/24 288 (300-½)		305/24 294 (300-½)	324/24 313 (300-½)
RNP 0.30 DA	405/35 394 (400-⅝)			

AUTHORIZATION REQUIRED

ELEV 26 D TDZE 11

REIL Rwy 1R
TDZ/CL Rwys 1L and 19L
HIRL Rwys 1L-19R, 1R-19L, and 10-28

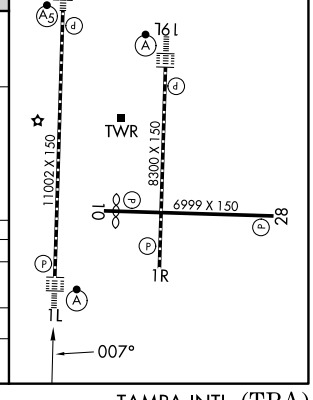

SE-3, 27 NOV 2025 to 25 DEC 2025
SE-3, 27 NOV 2025 to 25 DEC 2025