

LOC/DME I-TXK	APP CRS	Rwy Ldg	6602
111.9	220°	TDZE	384
Chan 56		Apt Elev	390


ILS or LOC RWY 22
TEXARKANA RGNL-WEBB FLD (TXK)

For inop ALS, increase S-LOC 22 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 direct TXK VORTAC and hold, continue climb-in-hold to 2000.

ATIS	FORT WORTH CENTER	TEXARKANA TOWER★	GND CON
120.2	123.925 269.475	123.875 (CTAF) 0 235.625	119.225

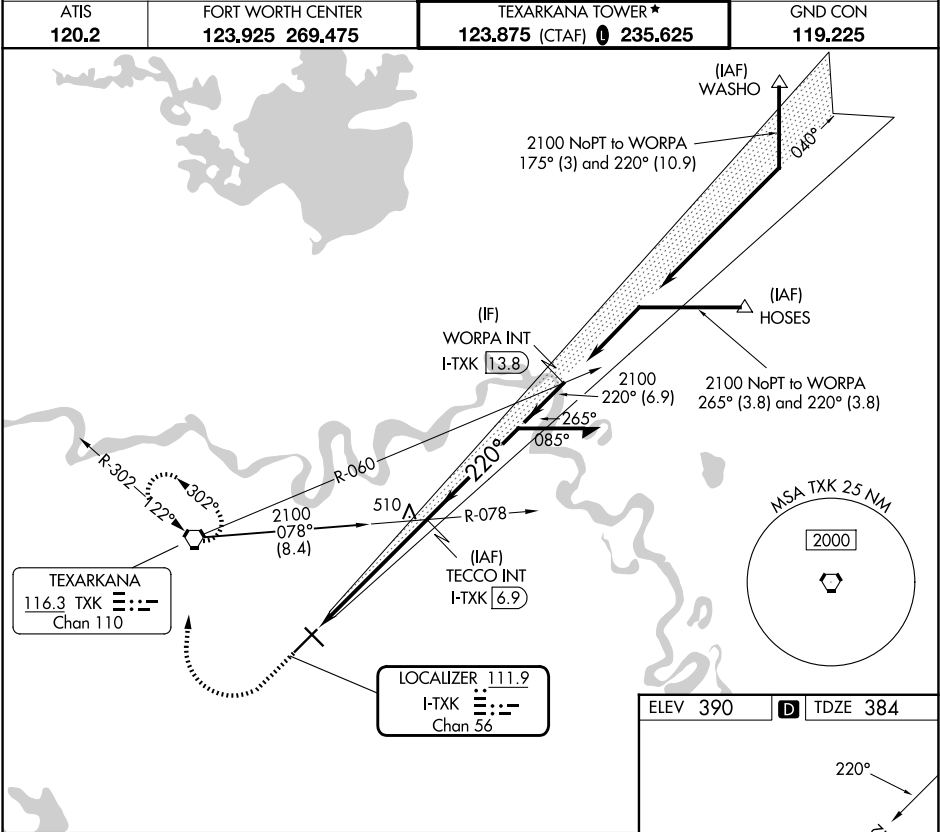

900	2000	TXK
↑	↪	⬢
TECCO INT I-TXK 6.9		
Remain within 10 NM		
2100 040° 2100		
2100 220° 2100		
GS 2.75° TCH 48		
1 NM 4.6 NM		
CATEGORY	A	B
S-ILS 22	584-1/2	200 (200-1/2)
S-LOC 22	760-1/2 376 (400-1/2)	760-5/8 376 (400-5/8)
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)
	1000-1 3/4 610 (700-1 3/4)	1080-2 1/4 690 (700-2 1/4)

