

WAAS Ch 53699 W22A	APP CRS 220°	Rwy Ldg 6602 TDZE 384 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 22

TEXARKANA RGNL-WEBB FLD (TXK)

⚠

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV and circling Cat C and D visibility ¼ mile. Baro-VNAV and VDP NA when using J Lynn Helms Sevier County altimeter setting. For inoperative MALSR when using J Lynn Helms Sevier County altimeter setting increase LPV all Cats visibility to 1¼.


MALSR



MISSED APPROACH:

Climb to 2000 direct YOBUG and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235.625	GND CON 119.225
----------------------	---	---	---------------------------

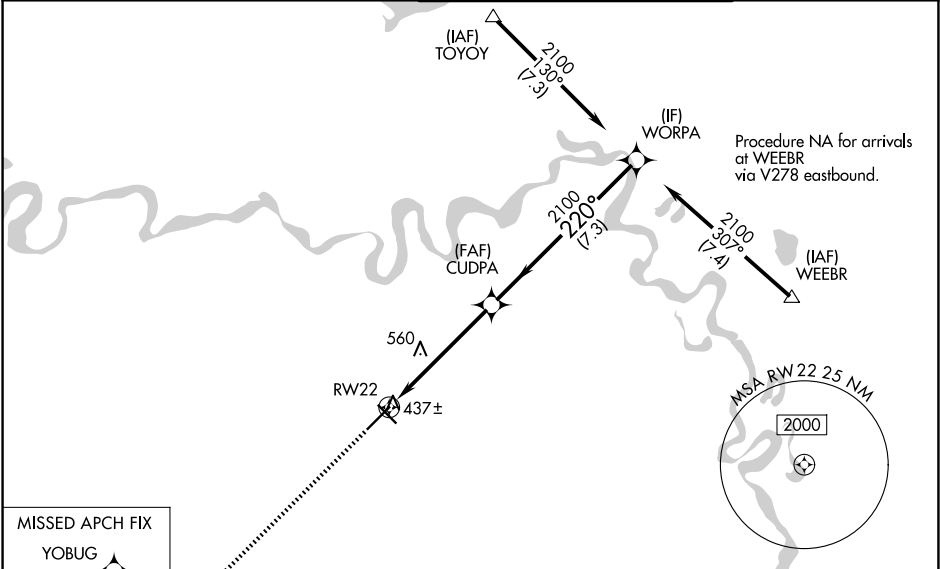

ELEV 390

D TDZE 384

2000

YOBUG

* LNAV only.

CUDPA

WORPA

Procedure Turn NA

GP 3.00°
TCH 45

1.2

4 NM

7.3 NM

CATEGORY	A	B	C	D
LPV DA	634-1½ 250 (300-1½)			
LNAV/VNAV DA	687-1½ 303 (300-1½)		687-¾ 303 (300-¾)	
LNAV MDA	820-1½ 436 (500-1½)	820-¾ 436 (500-¾)	820-1 436 (500-1)	
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1¾ 610 (700-1¾)	1080-2¼ 690 (700-2¼)

220°

2100

2100

1.2

4 NM

7.3 NM

13

2

5

TWR

AS

0.7% UP

0.5% UP

5200 X 100

6602 X 150

MIRL Rwy 13-31 **0**

HIRL Rwy 4-22 **0**