

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>Ch <b>93899</b><br><b>W04A</b> | APP CRS<br><b>040°</b> | Rwy Ldg <b>6602</b><br>TDZE <b>360</b><br>Apt Elev <b>390</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 4

TEXARKANA RGNL-WEBB FLD (TXK)


▼

⚠

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV and Circling Cat C and D visibility ½ mile. Baro-VNAV NA when using J Lynn Helms Sevier County altimeter setting.

MISSED APPROACH:  
Climb to 2100 direct WORPA and hold.

|                      |                                             |                                                      |                           |
|----------------------|---------------------------------------------|------------------------------------------------------|---------------------------|
| ATIS<br><b>120.2</b> | FORT WORTH CENTER<br><b>123.925 269.475</b> | TEXARKANA TOWER ★<br><b>123.875 (CTAF) 0 235.625</b> | GND CON<br><b>119.225</b> |
|----------------------|---------------------------------------------|------------------------------------------------------|---------------------------|

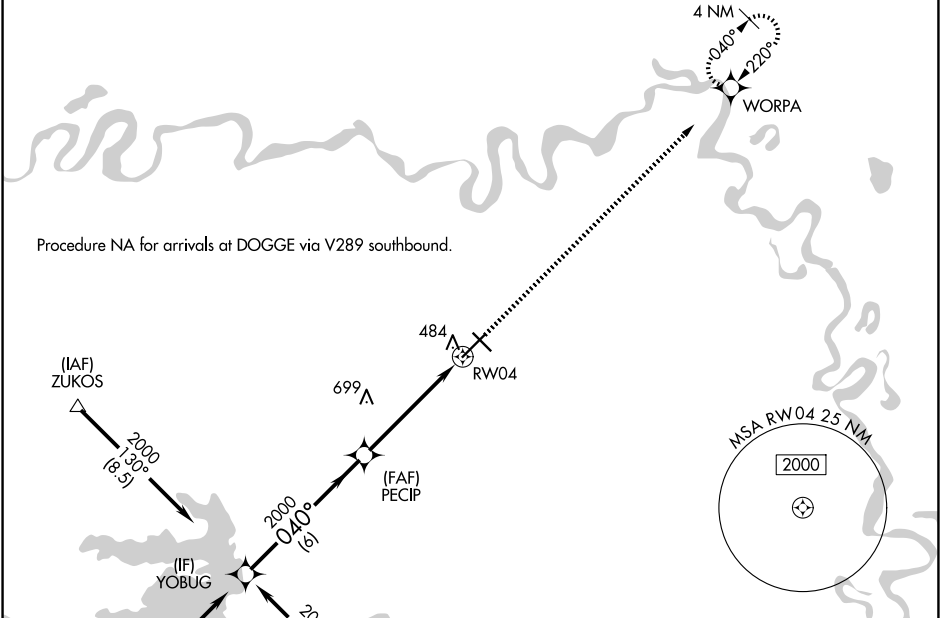

|          |  |            |  |
|----------|--|------------|--|
| ELEV 390 |  | D TDZE 360 |  |
|----------|--|------------|--|

Procedure

Turn NA

GP 3.00°

TCH 52

YOBUG

2000

040°

6 NM

PECIP

2000

5 NM

RW04

2100

WORPA

13

2

31

45

5200 X 100

6602 X 150

0.5% UP

0.7% UP

040°

TWR

MIRL Rwy 13-31 0

HIRL Rwy 4-22 0

| CATEGORY     | A                   | B                   | C                    | D |
|--------------|---------------------|---------------------|----------------------|---|
| LPV DA       | 613-1 253 (300-1)   |                     |                      |   |
| LNAV/VNAV DA | 866-1¾ 506 (500-1¾) |                     |                      |   |
| LNAV MDA     | 900-1 540 (600-1)   | 900-1½ 540 (600-1½) | 900-1¾ 540 (600-1¾)  |   |
| CIRCLING     | 900-1¾ 510 (600-1¾) | 1000-2 610 (700-2)  | 1080-2¼ 690 (700-2¼) |   |

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025