

WAAS CH 53511 W12A	APP CRS 118°	Rwy Ldg TDZE Apt Elev	7314 23 24
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 12R

VERO BEACH RGNL (VRB)


⚠

⚠

Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 302 feet; increase LNAV/VNAV DA to 317 feet; increase all MDAs 40 feet and LNAV Cat C/D visibility 1⁄8 SM and Circling Cat C/D visibility 1⁄4 SM.

MISSED APPROACH:
Climb to 2000 direct PUUMA and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
------------------------	--	---	--------------------------	-------------------------

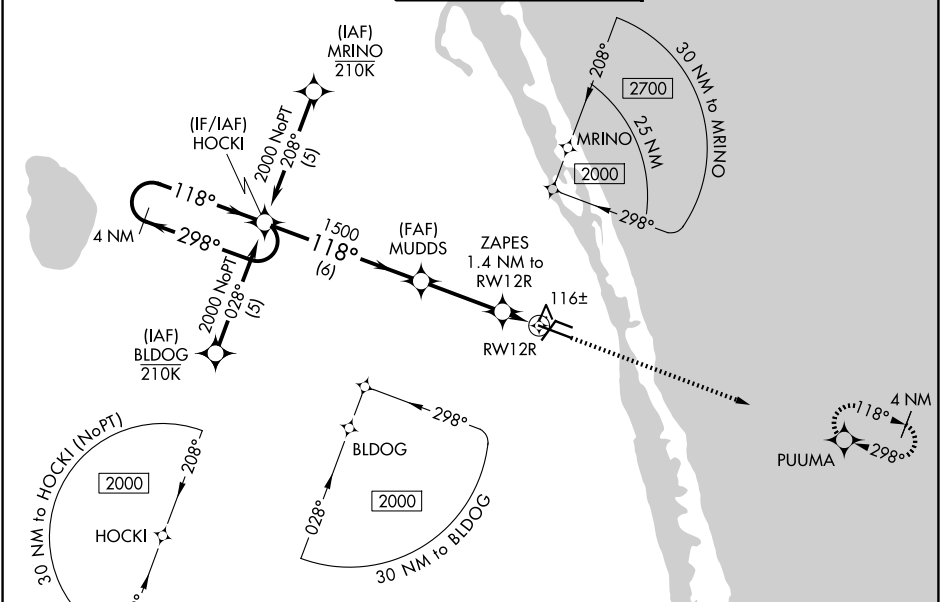

4 NM Holding Pattern

HOCKI

2000

298°

118°

118°

GP 3.00°

TCH 42

MUDDS

1500

ZAPES 1.4 NM to RWY 12R

RWY 12R

1500

500

6 NM

3.1 NM

1.4 NM

2000

PUUMA

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		279-3⁄4	256 (300-3⁄4)	
LNAV/VNAV DA		294-7⁄8	271 (300-7⁄8)	
LNAV MDA		380-1	357 (400-1)	
CIRCLING	560-1	536 (600-1)	660-1 3⁄4 636 (700-1 3⁄4)	820-2 1⁄2 796 (800-2 1⁄2)

ELEV 24

D

TDZE 23

118°

12R

12L

30L

30R

3505 X 75

7314 X 100

4618 X 174

TWR

MIRL Rwy 4-22, 12R-30L, and 12L-30R 0

REIL Rwy 4, 12R, 22 and 30L 0

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025