

WAAS CH 65925 W18A	APP CRS 179°	Rwy Ldg 5001 TDZE 275 Apt Elev 279
--	------------------------	---

RNAV (GPS) RWY 18
WALNUT RIDGE RGNL (ARG)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 529 feet, LNAV/VNAV DA to 579 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.

ODALS



MISSED APPROACH.
Climb to 3100 direct
GUBFO and hold.

AWOS-3PT


126.525

MEMPHIS CENTER


120.075 289.4

UNICOM

122.8 (CTAF) L

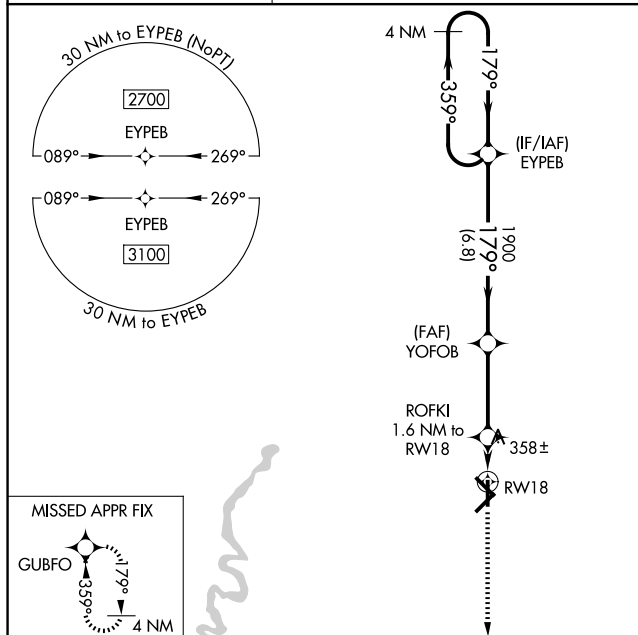[illegible]

CATEGORY	A	B	C	D
LPV DA	475- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/ VNAV DA	525- ³ / ₄ 250 (300- ³ / ₄)			
LNAV MDA	620- ³ / ₄	345 (400- ³ / ₄)	620- ⁷ / ₈	345 (400- ⁷ / ₈)
CIRCLING	760-1	481 (500-1)	800-1 ¹ / ₂ 521 (600-1 ¹ / ₂)	1000-2 ¹ / ₄ 721 (800-2 ¹ / ₄)

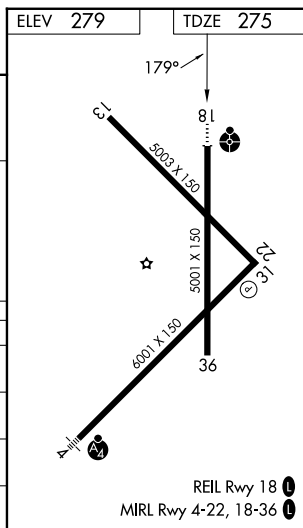

WALNUT RIDGE, ARKANSAS

Amdt 1B 20MAY21

36°07'N-90°56'W

WALNUT RIDGE RGNL (ARG)
RNAV (GPS) RWY 18

SC-1, 27 NOV 2025 to 25 DEC 2025