# RNAV (GPS) RWY 22
## WALNUT RIDGE RGNL (ARG)

| WAAS CH 82125 W22A | APP CRS 224° | Rwy Ldg 6001<br>TDZE 274<br>Apt Elev 279 |
|---|---|---|

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ⅛ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2700 direct XIHAM and hold.

| AWOS-3PT | MEMPHIS CENTER | UNICOM |
|---|---|---|
| 126.525 | 120.075 289.4 | 122.8 (CTAF) L |

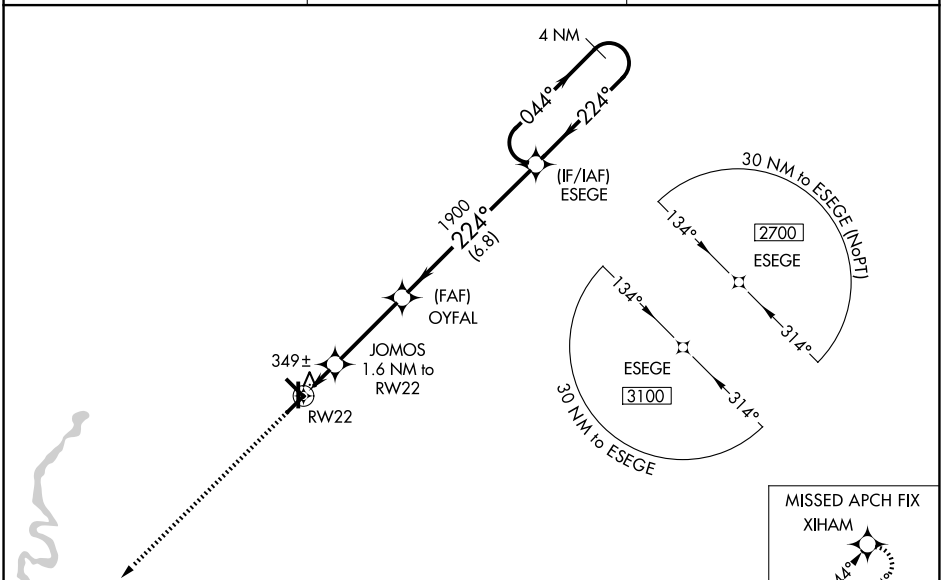


ELEV 279 TDZE 274

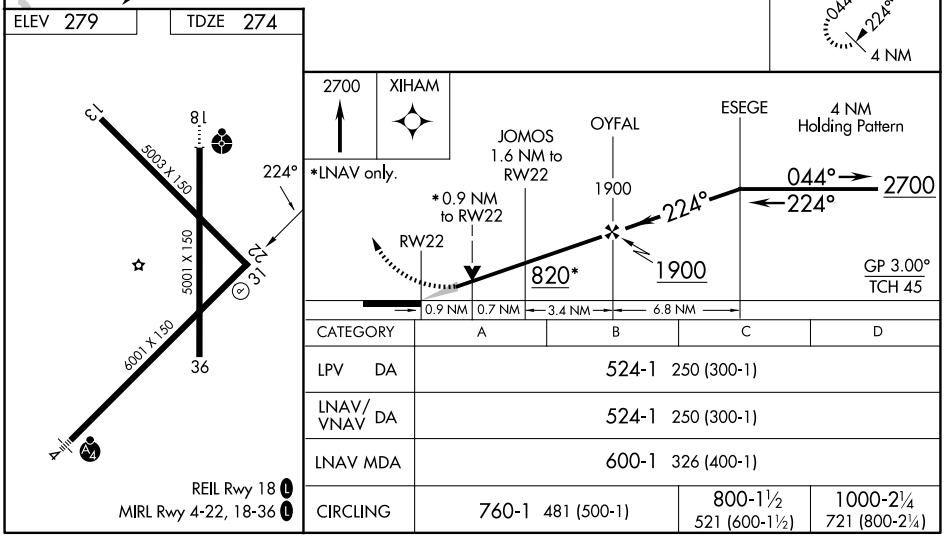


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 524-1 250 (300-1) | | | |
| LNAV/VNAV DA | 524-1 250 (300-1) | | | |
| LNAV MDA | 600-1 326 (400-1) | | | |
| CIRCLING | 760-1 481 (500-1) | | 800-1½ 521 (600-1½) | 1000-2¼ 721 (800-2¼) |



SC-1, 27 NOV 2025 to 25 DEC 2025
SC-1, 27 NOV 2025 to 25 DEC 2025