

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>77825</b><br><b>W04A</b> | APP CRS<br><b>044°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6001</b><br><b>279</b><br><b>279</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (ARG)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.

MALSF

MISSED APPROACH: Climb to 2700 direct ESEGE and hold.

|                            |                                        |                                 |
|----------------------------|----------------------------------------|---------------------------------|
| AWOS-3PT<br><b>126.525</b> | MEMPHIS CENTER<br><b>120.075 289.4</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|----------------------------------------|---------------------------------|

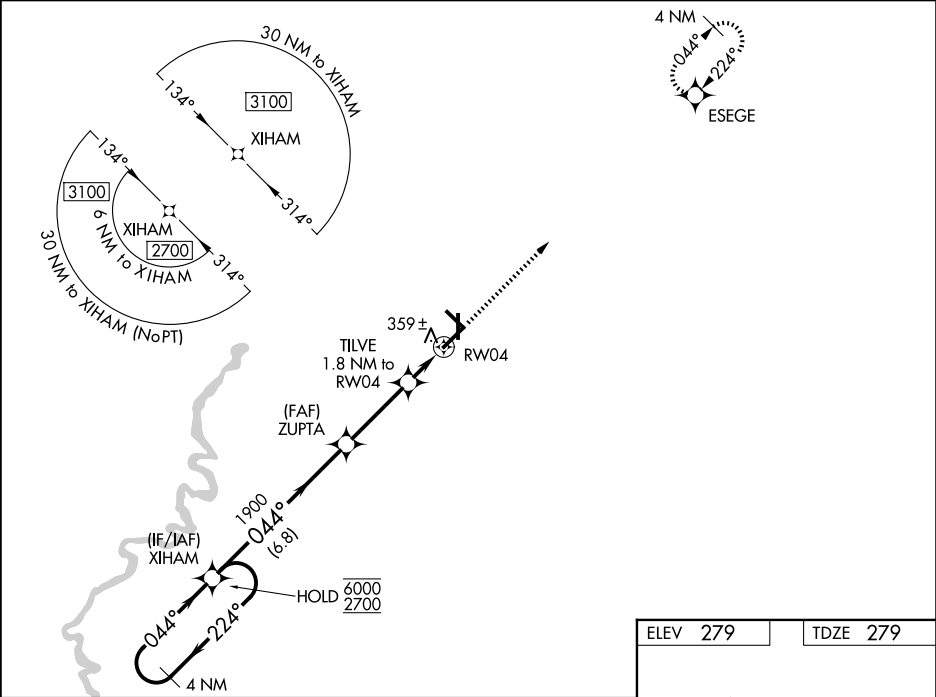

|                          |       |                  |                        |        |                         |       |  |                |  |                |  |  |
|--------------------------|-------|------------------|------------------------|--------|-------------------------|-------|--|----------------|--|----------------|--|--|
| 4 NM Holding Pattern     |       | XIHAM            |                        | ZUPTA  |                         | TILVE |  | 2700           |  | ESEGE          |  |  |
| <div>6000<br/>2700</div> |       | ← 224°<br>044° → |                        | 044°   |                         | 1900  |  | 1.8 NM to RW04 |  | 0.9 NM to RW04 |  |  |
| GP 3.00°<br>TCH 45       |       |                  |                        | 1900   |                         | 900   |  | RW04           |  |                |  |  |
|                          |       | 6.8 NM           |                        | 3.1 NM |                         | 0.9   |  | 0.9            |  |                |  |  |
| CATEGORY                 | A     | B                |                        | C      |                         | D     |  |                |  |                |  |  |
| LPV DA                   | 529-¾ |                  | 250 (300-¾)            |        |                         |       |  |                |  |                |  |  |
| LNAV/VNAV DA             | 529-¾ |                  | 250 (300-¾)            |        |                         |       |  |                |  |                |  |  |
| LNAV MDA                 | 620-¾ |                  | 341 (400-¾)            |        |                         |       |  |                |  |                |  |  |
| CIRCLING                 | 840-1 | 561 (600-1)      | 840-1½<br>561 (600-1½) |        | 1000-2¼<br>721 (800-2¼) |       |  |                |  |                |  |  |

