

|                        |                                                             |
|------------------------|-------------------------------------------------------------|
| APP CRS<br><b>007°</b> | Rwy Ldg <b>6869</b><br>TDZE <b>14</b><br>Apt Elev <b>14</b> |
|------------------------|-------------------------------------------------------------|

## RNAV (RNP) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

**T** For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 48°C (120°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾ mile.

ALSF-2



**MISSED APPROACH:** (Do not exceed 185K until FIVUD) Climb to 2200 left turn to FIVUD and on track 327° to HESLO and on track 327° to GTN NDB and hold.



|                         |                                                                         |                                        |                               |
|-------------------------|-------------------------------------------------------------------------|----------------------------------------|-------------------------------|
| D-ATIS<br><b>132.65</b> | POTOMAC APP CON<br><b>119.85 239.25</b> (W/S)<br><b>124.2 360.8</b> (E) | WASHINGTON TOWER<br><b>119.1 257.6</b> | GND CON<br><b>121.7 257.6</b> |
|-------------------------|-------------------------------------------------------------------------|----------------------------------------|-------------------------------|

MISSED APCH FIX



GEORGETOWN  
GTN

Prohibited area (P-56) 1.5 NM north of DCA- avoid surface to 18000 MSL.

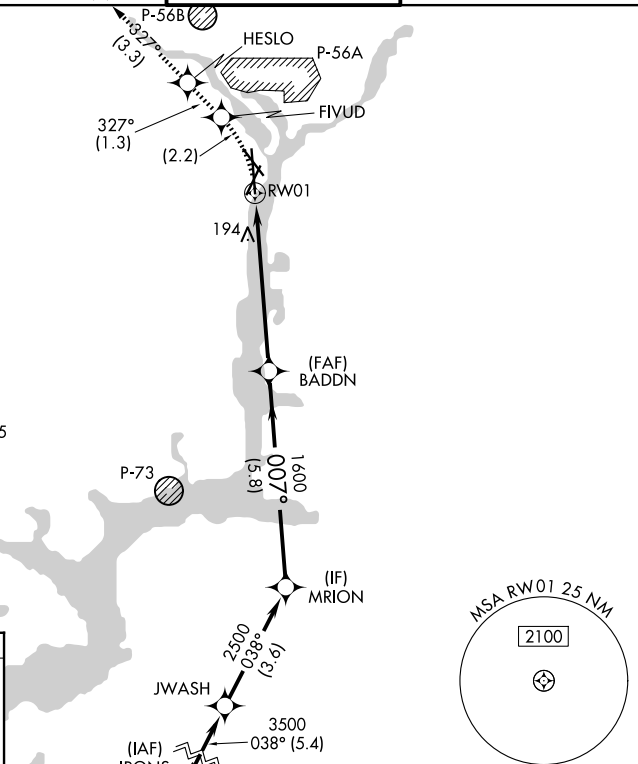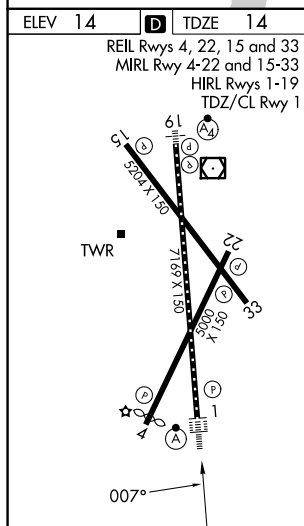

|           |                  |                  |         |  |
|-----------|------------------|------------------|---------|--|
| 2200<br>↑ | FIVUD<br>tr 327° | HESLO<br>tr 327° | GTN<br> |  |
|-----------|------------------|------------------|---------|--|

RW01

4.8 NM

BADDN 1600

5.8 NM

MRION 2500

007°

160°

GP 3.00°  
TCH 54

|             |   |        |              |   |
|-------------|---|--------|--------------|---|
| CATEGORY    | A | B      | C            | D |
| RNP 0.30 DA |   | 552/60 | 538 (600-1¼) |   |

**AUTHORIZATION REQUIRED**