

ILS or LOC/DME Y RWY 33L

|                                                 |                         |                                                                             |
|-------------------------------------------------|-------------------------|-----------------------------------------------------------------------------|
| LOC/DME I-SPS<br><b>109.7</b><br>Chan <b>34</b> | APCH CRS<br><b>333°</b> | Rwy Idg<br>TDZE<br>Arpt Elev<br><b>13.100</b><br><b>1000</b><br><b>1019</b> |
|-------------------------------------------------|-------------------------|-----------------------------------------------------------------------------|

[USAF]



SHEPPARD AFB/WICHITA FALLS MUNI (KSPS)

**⚠** \* When ALS inop, increase vis to ¾ mile.  
\*\* When ALS inop, increase vis to 1 mile.  
\*\*\* When ALS inop, increase CAT AB vis to 1 mile;  
CAT CDE vis to 1½ miles.

**MALSR**  
**A5**

**MISSED APPROACH:** Climb to 2200, then  
climbing right turn to 3100 via SPS VORTAC  
R-030 to EYERI (SPS R-030/11) and hold.

|                               |                                 |                                           |                               |     |
|-------------------------------|---------------------------------|-------------------------------------------|-------------------------------|-----|
| ATIS ★<br><b>132.05 269.9</b> | APP CON<br><b>118.2 269.025</b> | TOWER ★<br><b>119.75 0 279.525</b> (CTAF) | GND CON<br><b>125.5 289.4</b> | ASR |
|-------------------------------|---------------------------------|-------------------------------------------|-------------------------------|-----|

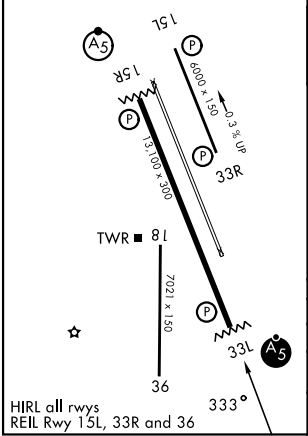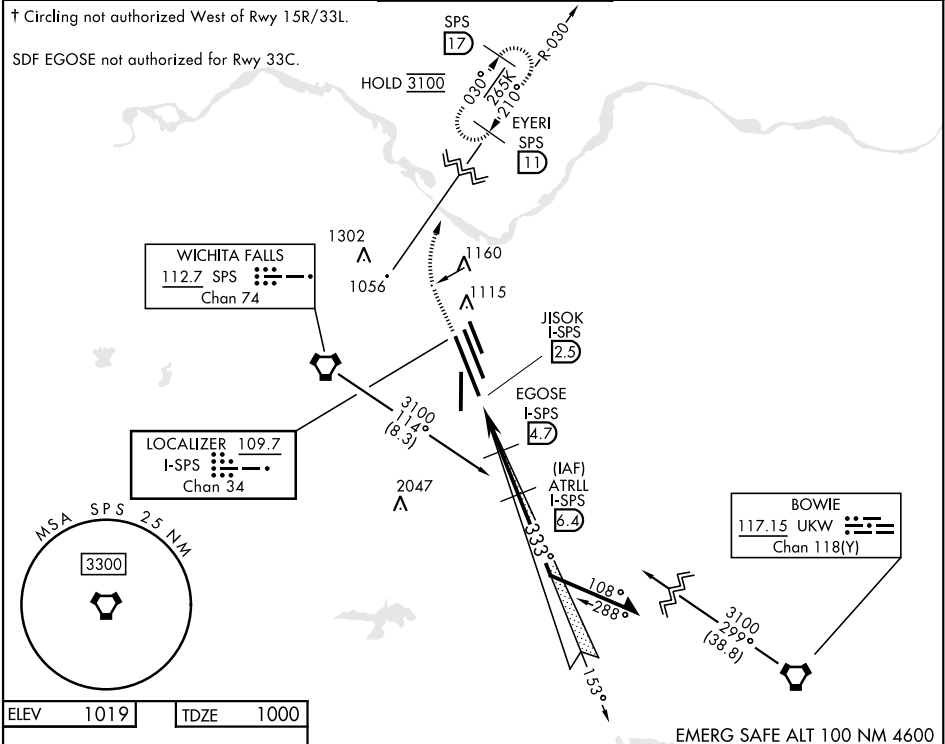

**EMERG SAFE ALT 100 NM 4600**

**VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 56).**

|              |                    |                    |                      |                      |        |      |
|--------------|--------------------|--------------------|----------------------|----------------------|--------|------|
| 2200         | 3100               | EYERI SPS 11       | ATRLL I-SPS 6.4      | 3100                 | 153°   | 2500 |
|              |                    |                    |                      | 2300                 | 333°   |      |
|              |                    | JISOK I-SPS 2.5    | EGOSE I-SPS 4.7      | 1740                 |        | 2300 |
|              |                    |                    |                      | 1200                 |        |      |
|              |                    |                    |                      | 2.2 NM               | 1.8 NM |      |
|              |                    |                    |                      |                      |        |      |
| CATEGORY     | A                  | B                  | C                    | D                    | E      |      |
| S-ILS 33L *  | 1200-½ 200 (200-½) |                    |                      |                      |        |      |
| S-LOC 33L ** | 1340-½ 340 (400-½) |                    |                      |                      |        |      |
| CIRCLING†    | 1440-1 421 (500-1) | 1480-1 461 (500-1) | 1480-1½ 461 (500-1½) | 2100-3 1081 (1100-3) |        |      |

**GS 3.00° TCH 48**

ILS or LOC/DME Y RWY 33L