


APP CRS	Rwy Ldg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R

TRI-CITIES (PSC)

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cnts visibility to RVR 5700 and RNP 0.30 all Cnts visibility to 1½ mile.	MALSR	MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.
--	--------------	---

ATIS 125.65	SPOKANE APP CON * 128.75 377.2	TRI-CITIES TOWER * 135.3 (CTAF) 0 285.55	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	---	------------------	------------------

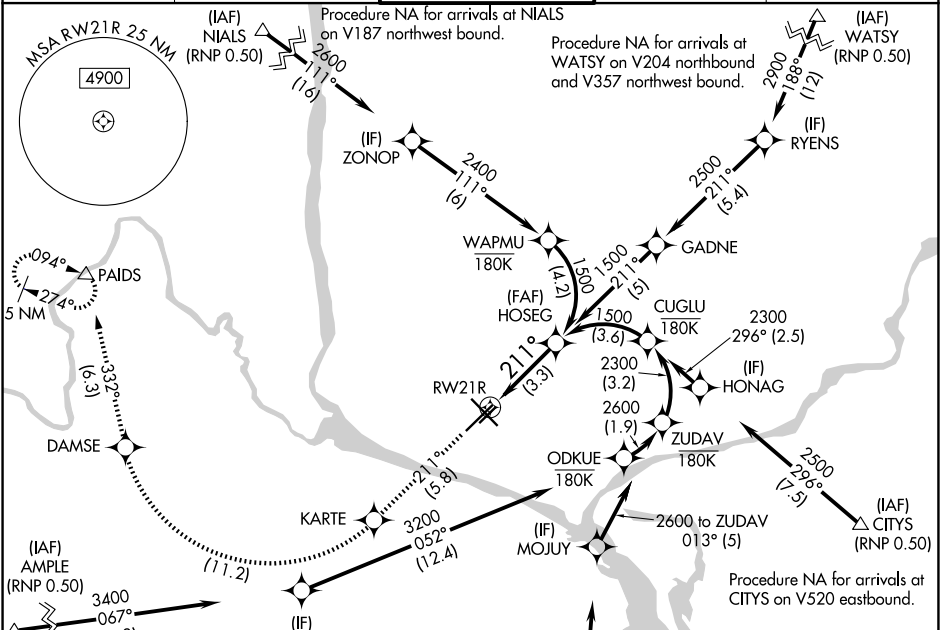

ELEV 410	TDZE 404
----------	----------

Procedure NA for arrivals at AMPLF on V4 westbound and V520 southwest bound.

Procedure NA for arrivals at GINLE on V298 southeast bound.

Procedure NA for arrivals at NIALS on V187 northwest bound.

Procedure NA for arrivals at WATSY on V204 northbound and V357 northwest bound.

Procedure NA for arrivals at CITYS on V520 eastbound.

See planview for multiple IF locations.

RW21R


211°

3.3 NM

GP 3.00° TCH 55

CATEGORY	A	B	C	D
RNP 0.11 DA		754/33	350 (400-½)	
RNP 0.30 DA		832/48	428 (500-1)	

AUTHORIZATION REQUIRED

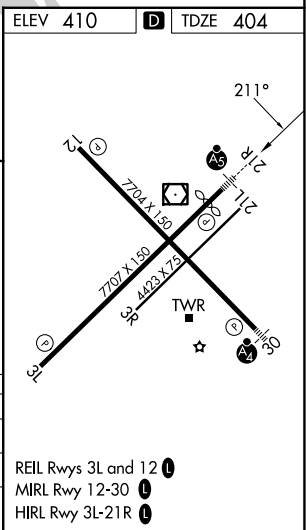

NW-1, 27 NOV 2025 to 25 DEC 2025

NW-1, 27 NOV 2025 to 25 DEC 2025