

ALTUS, OKLAHOMA

RNAV (GPS) Z RWY 36L

APCH CRS 355°	Rwy Idg 13,440 TDZE 1354 Arpt Elev 1382
------------------	---

AL-482 (USAF)

ALTUS AFB (KLTS)

RNP APCH. DME/DME RNP 0.3 NA

T * When ALS inop, increase CAT AB RVR to 40, vis to 3/4 mile; CAT CD RVR to 45, vis to 7/8 mile; CAT E RVR to 50, vis to 1 mile.
 ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.

ALSF-1


MISSED APPROACH: Climb to 4000 direct MRTHA and hold.



ATIS★ 109.8 273.5	FORT WORTH CENTER 133.5 350.35	APP CON 125.1 353.7	TOWER★ 119.65 254.4	GND CON 121.85 275.8	CLNC DEL 120.65 284.7
----------------------	-----------------------------------	------------------------	------------------------	-------------------------	--------------------------

*** Circling NA W of Rwy 18R-36L.

For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54° (130°F)

HOLD 9000

MRTHA

2422

2180
A

RW36L
SACYO

(FAF)
LODNE
Λ
1664 8

(IF/IAF) ^c
OKKIE
pT


MORGE
3100

3100 NoPT
289°

ATC RADAR required for holding above 4000.



FIBEK
3100

EMERG SAFE ALT 100 NM 4900

HOLD 7000

ELEV 1382

TDZE 1354

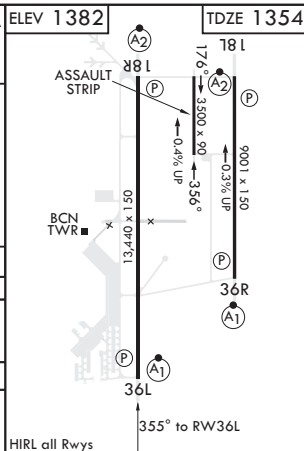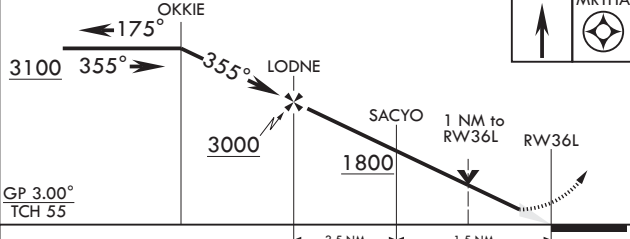

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	1604/24	250 (300-½)	1615/24 261 (300-½)	1634/24 280 (300-½)	1677/26 323 (300-½)
LNAV MDA**	1740/24	386 (400-½)	1740/35	386	(400-½)
 CIRCLING***	1780-1 398 (400-1)	1840-1 458 (500-1)	1880-1½ 498 (500-1½)	2080-2¼ 698 (700-2¼)	2180-2¾ 798 (800-2¾)

ALTUS, OKLAHOMA

34°40'N - 99°16'W

ALTUS AFB (KLTS)

Amdt 3 14JUL22

RNAV (GPS) Z RWY 36L

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025