


LOC I-RUM 108.7	APP CRS 126°	Rwy Ldg TDZE Apt Elev 5601 593 595
---------------------------	------------------------	--

ILS or LOC RWY 13
SAN MARCOS RGNL (HYI)

ADF required. Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to S-ILS 13 all Cats. For inop ALS, increase S-LOC 13 Cat C/D/E visibility to 1 1/8 SM.	MALS A	MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.
--	-----------	---

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	--	---------------------------

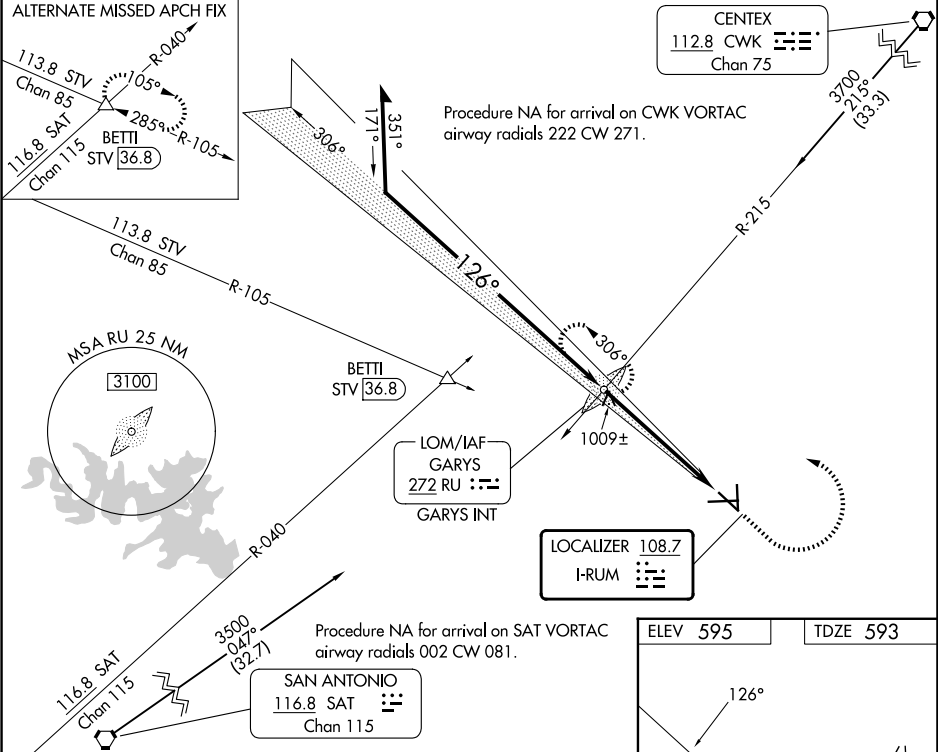

	RU LOM GARYS INT		2441		
	3200		2700		
CATEGORY	A	B	C	D	E
S-ILS-13	793-3/4		200 (200-3/4)		
S-LOC-13	1260-3/4 667 (700-3/4)		1260-13/4 667 (700-13/4)		
CIRCLING	1260-1 665 (700-1)		1260-17/8 665 (700-17/8)	1320-21/4 725 (800-21/4)	1340-23/4 745 (800-23/4)

MIRL Rwy 8-26, 13-31, and 17-35 **0**

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50