




WAAS CH 77832 W17A	APP CRS 171°	Rwy Ldg 5214 TDZE 595 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 17
SAN MARCOS RGNL (HYI)

⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and Circling Cat C/D visibility $\frac{1}{4}$ mile; increase LNAV/VNAV all Cats and LNAV Cat C/D/E visibility $\frac{1}{8}$ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH.
Climb to 3100 direct
C/LAK and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	--	---------------------------

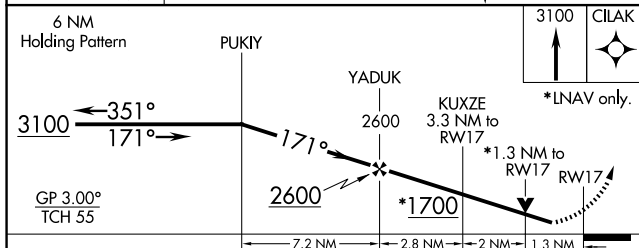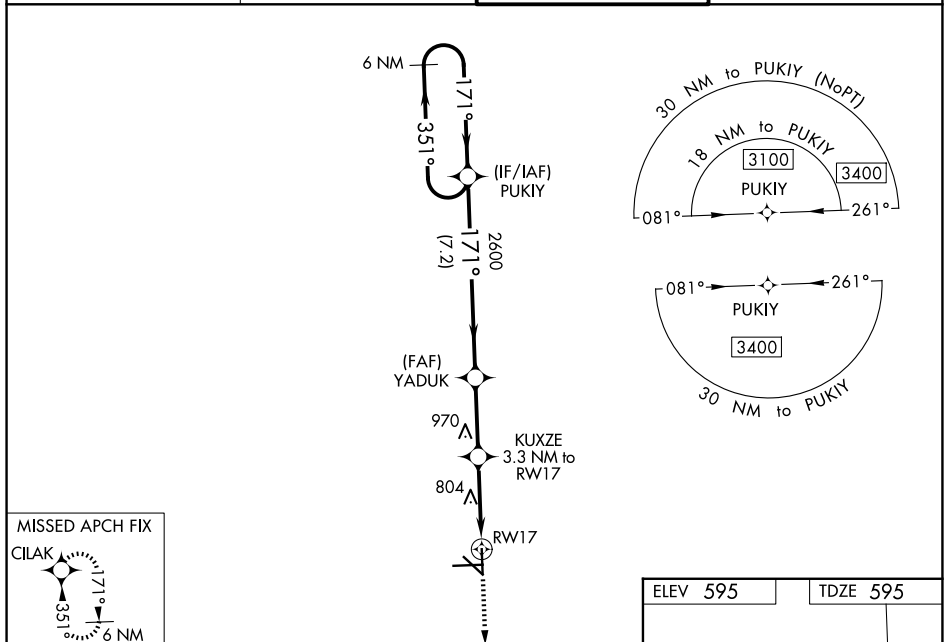

CATEGORY	A	B	C	D	E
LPV DA	960-1 $\frac{1}{8}$ 365 (400-1 $\frac{1}{8}$)				
RNAV/ VNAV DA	1052-1 $\frac{1}{2}$ 457 (500-1 $\frac{1}{2}$)				
RNAV MDA	1060-1 465 (500-1)	1060-1 $\frac{3}{8}$ 465 (500-1 $\frac{3}{8}$)			
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 $\frac{3}{4}$ 645 (700-1 $\frac{3}{4}$)	1320-2 $\frac{1}{4}$ 725 (800-2 $\frac{1}{4}$)	1340-2 $\frac{3}{4}$ 745 (800-2 $\frac{3}{4}$)

