

WAAS CH 70632 W35A	APP CRS 351°	Rwy Ldg TDZE 583 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 35



SAN MARCOS RGNL (HYI)


⚠

Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile; and increase LNAV Cat C/D/E visibility and Circling Cat C/D visibility ¼. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting.

MISSED APPROACH:
Climb to 3100 direct PUKIY and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 1	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

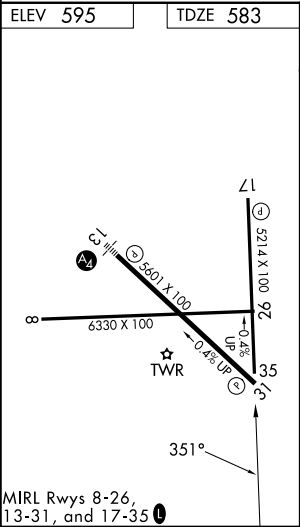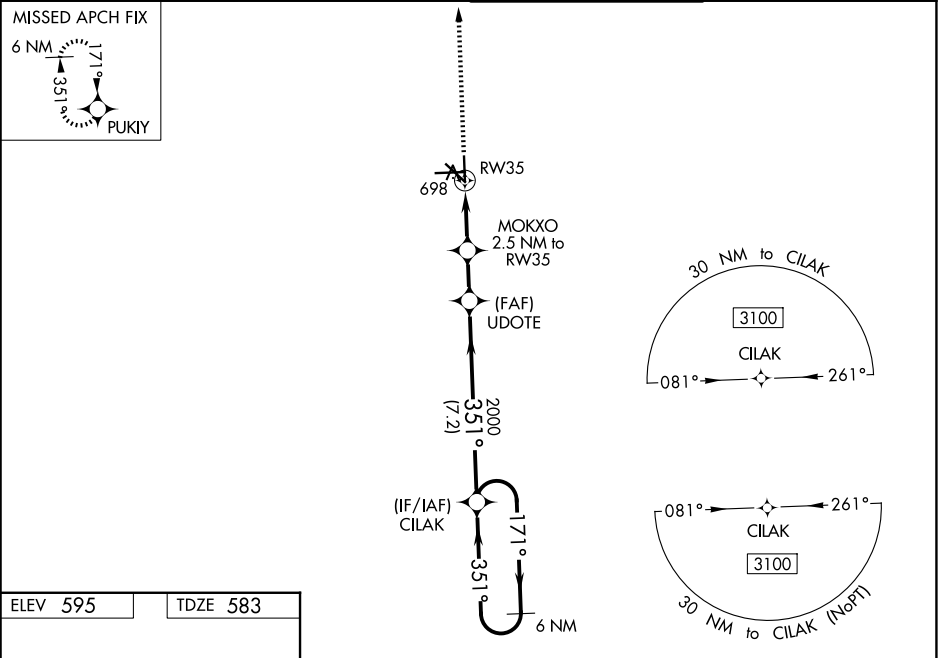

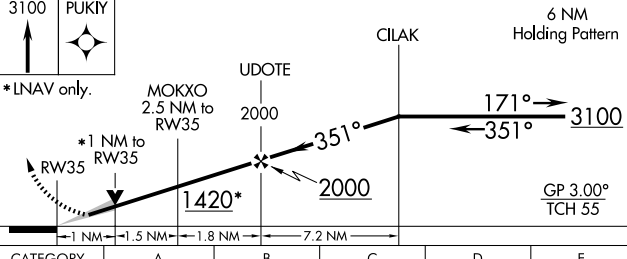3100	PUKIY	6 NM Holding Pattern			
					
*LNAV only.					
					
CATEGORY	A	B	C	D	E
LPV DA	833- ³ / ₄ 250 (300- ³ / ₄)				
LNAV/ VNAV DA	884-1 301 (300-1)				
LNAV MDA	960-1 377 (400-1)		960-1 ¹ / ₈ 377 (400-1 ¹ / ₈)		
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240- ¹³ / ₄ 645 (700- ¹³ / ₄)	1320- ² / ₄ 725 (800- ² / ₄)	1340- ² / ₄ 745 (800- ² / ₄)